



WOODPECKER

NATURALLY INSPIRED FLOORING



WELCOME

NATURALLY INSPIRED FLOORING

Timeless, elegant, unique. Nothing gives a space that warm, comfortable feeling quite like a beautiful wood floor. It's something that can remind you of time spent outdoors admiring a woodland scene, or a barefoot walk among the trees with their scent on the air and soft foliage under your feet. At Woodpecker, we love the sense of being close to nature that wood flooring brings to the home.

RESPONSIBLE AND BEAUTIFUL

Nothing proves that more than how we source our wood. We select the trees we use before they are felled, paying close attention to how they're sawn, stacked and dried. Looking after nature is as important to us as it is to you. As a result, we only bring you responsibly sourced wood with full FSC® or PEFC certifications.

Woodpecker freshly sawn wood is air dried for over twelve months. Then we kiln it twice, to bring out any residual moisture. These careful processes ensure that maximum stability is achieved in every Woodpecker floor.

AN EXCITING FINISH

We love inspecting the grain patterns, colour variations and knots as we choose which wood will best suit the different finishes. The natural aspects of timber are what make our flooring unique and exciting, and we grade and machine each board to an exacting standard that makes the most of these features.

Woodpecker's outstanding finishing aims to augment the natural feel. We continue to use a range of traditional hand-finishing techniques that have been perfected over several centuries. Lacquering, oiling and antiquing the wood, our craftsmen give it the attention it deserves, achieving that special finish.

NATURAL FEELING

All the way from the forest to your floor, nature is what inspires us. When you feel one of our floors underfoot, it will take you back to a woodland setting, with the scents and sounds of the forest on the air and a warm, relaxing atmosphere surrounding you.



25-YEAR WARRANTY

"YOUR SATISFACTION IS GUARANTEED WITH WOODPECKER"





GOODRICH ECRU OAK
See page 60

WELCOME

CONTENTS

TYPES OF FLOORING	6
GRADING / HARDNESS	7
FINISHES	8
SOLID WOOD	11
YORK	13
ENGINEERED WOOD	21
SALCOMBE	23
HARLECH	33
BERKELEY	45
GOODRICH	55
CHEPSTOW	65
BAMBOO	77
OXWICH	79
LAMINATE	85
WEMBURY	87
BRECON	99
THE RANGE AT A GLANCE	108
ACCESSORIES	113
NATURALLY INSPIRED WALLS	114
PROFILES	116
PROFILO PROFILES	118

CONTOUR PROFILES	120
STAIRPRO	123
OXWICH PROFILES	124
METAL PROFILES	125
LAMINATE PROFILES	126
FINISHING TOUCHES	127
UNDERLAYS & BARRIERS	128
ADHESIVES & SEALANTS	130
ROUTINE CARE	132
LONG TERM MAINTENANCE	133
TECHNICAL	135
PREPARATION	136
USING ADHESIVE	137
FLOATING	138
NAILING	139
THE TRICKY BITS	140
UNDERFLOOR HEATING	141
SHORT TERM CARE	142
LONG TERM CARE	143
PACK CALCULATOR	144

DISCLAIMER

Although every care has been taken in the reproduction of this catalogue, each product has its own individual character. Variations will inevitably occur in the colour and structure and the physical limitations of the printing process mean that we cannot guarantee your floor will look identical to the illustration.

SPECIFICATION DISCLAIMER

Woodpecker Flooring reserves the right to change dimensions and grading specification without notice. Customers should confirm that the floor of their choice is still available with the specification shown.

PRICE DISCLAIMER

Prices can be changed without notice and should be checked prior to orders being placed. No responsibility or liability is accepted by Woodpecker Flooring for any loss arising from such a change.

N.b Prices included in this catalogue are recommended retail prices.

E & OE

While every effort is made to ensure that accurate pricing and descriptions are given, we reserve the right to decline orders if they are based on inaccurate information in this publication.

© Copyright 2018. No part of this catalogue may be copied or reproduced in any way, without the express written permission of Woodpecker Flooring. Nor may this catalogue be used to sell or promote any products other than Woodpecker®.

TYPES OF FLOORING

CHOOSE WHAT'S PERFECT FOR YOU AND YOUR HOME



SOLID WOOD

Nothing beats solid wood for a timeless natural texture, and a robust feel beneath your feet. It suits both contemporary and traditional interior design, and is long-lasting with each board precision machined from a single section of timber. Tongue and groove on all edges makes for tight, strong joints when fitted.



ENGINEERED WOOD

Each engineered board is made from multiple layers of wood pressed together. The solid top layer displays the colour and pattern you'll see and feel. In the middle of each board is a central core and below that there's a backing board for stability. Engineered flooring is available in a wide range of wood types, finishes and thicknesses.



BAMBOO

Though bamboo is actually a type of grass, when made into flooring its characteristics are similar to hardwood. Bamboo takes just five years to grow before it can be harvested, and is 100% sustainable. We make boards from bamboo using the strand weaving technique, creating a strong and extremely tough flooring.



LAMINATE

Simulating the appearance of real wood, laminate floors have a printed foil surface showing a wood grain pattern, covered in a tough, transparent wear layer. Essentially a man-made solution, laminate flooring has a high-density core made from natural materials, making it strong, stable and flexible.




GRADING

IT'S THE GRAIN THAT GIVES WOOD ITS CHARACTER




SELECT

This grade looks natural yet consistent, with few knots. Up to 10% sapwood can be found in Select boards along with considerable grain and colour variation, but only small knots.



RUSTIC

More of the wood's character shines through in rustic floors - including large knots, dark streaks, filled knots and colour variation. Again, up to 10% sapwood is likely in this grade.



EXTRA RUSTIC

Very little is graded out in the extra rustic category. Large knots, splits, cracks and any amount of sapwood make this a fun choice, and mean that your floor will be all that more distinctive.

EXPERT TIP

A NOTE ABOUT KNOTS

Knots occur naturally in wood where a branch grows out of the main trunk. They can go deep into the timber's core. In terms of flooring, there are two types of knot. A dead knot is where the core of the knot has fallen out or been removed, and then filled.

With a live knot, the core remains in the board. All grades contain both types of knots.

If you don't want large knots in your flooring, ask your fitter to cut them out and fill them. Note that it's not always possible to find an exact colour match when filling a knot.



COLOUR VARIATION

All Woodpecker floors feature beautiful colour variations which naturally occur in real wood. Due to this authentic effect, please be aware that your floor could include a range of lighter and darker shades, as shown in the picture to the left.

More intense colour variations may also be found where sapwood is present in the wood. Sapwood is the younger, outer part of the tree which is lighter in colour than the retired, inner part which makes up the majority of our wood floors. Find out how much sapwood to expect in the guides to grading above.

Your Woodpecker retailer will be happy to help with more advice on colour variation and can provide samples showing how it appears. Find your nearest retailer at our website: www.woodpeckerflooring.co.uk/retailers



SMOKED FLOORS

Some of our woods are smoked to intensify the natural colour variations for a really exciting wood floor. Look out for the icon (pictured to the left) next to our smoked products in the catalogue.

HARDNESS

UNDERSTANDING HOW SPECIES DIFFER

BAMBOO (STRAND WOVEN)

OAK

WALNUT


SOFTER

HARDER



FINISHES

ENHANCING YOUR WOOD FLOOR'S NATURAL LOOK AND FEEL

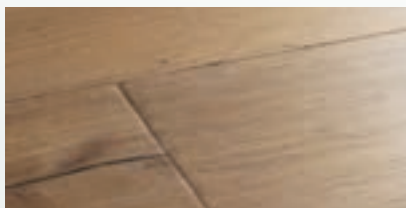

UV OILED




The natural beauty of the wood grain is brought to the fore when an oil penetrates its surface. Each board is coated between five and seven times, and cured with a UV lamp between coats to produce a protective, muted appearance. If an oiled floor is scratched, it can be retouched with oil to diminish the mark.



UV LACQUERED



Extremely smooth, glossy and exciting, a lacquered floor is also hardwearing, easy to clean and maintain. Five to seven coats of lacquer go onto each board, which is UV cured at each stage of the process. After curing, it's sanded again before another layer of lacquer is applied.

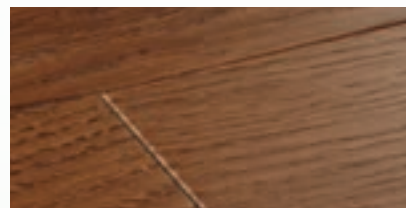

UV MATT LACQUERED




If you love the understated look of an oiled finish but are concerned about its upkeep, a Matt Lacquered finish is the answer. With a dull satin sheen, the surface is smooth and hardwearing, as is true to a lacquer, but has the appearance of an oiled floor.



UNFINISHED



Could anything feel more natural and authentic? An unfinished floor also gives you the chance to create a bespoke finish by painting, oiling or varnishing exactly how you wish. Unfinished boards are supplied with knots pre-filled and are pre-sanded ready for final filling and finishing.

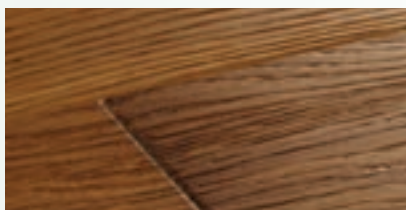

BRUSHED & MATT LACQUERED



A great option if you love the natural feel of timber, these boards are lightly brushed to remove the softer fibres between the harder grains. The finish subtly highlights the wood's texture both to the eye and to the touch, for a wonderful feel that instantly evokes woodland charm in your home.



SAWN



If you enjoy nature in its rawest, roughest form then the sawn finish celebrates these elements. Kerfs from the saw marks are left on the boards to see and feel, as though the wood has been freshly cut in front of you. The surface captures a wonderfully rough texture and rustic appeal.






HANDSCRAPED



This finish sees each plank painstakingly scraped by hand, bringing a whole new dimension to your natural floor. The irregular ridges and grooves that result add depth and definition to the wood's surface, creating an aged look that's distinctive by eye yet smooth to the touch.

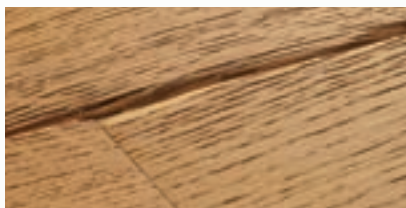

DISTRESSED BEVELS



Each plank is hand distressed on its edges to produce small grooves and undulations that are reminiscent of a naturally aged floor. The subtle yet interesting effect captures the charming timeworn appeal of a floor that's been loved by thousands of feet.



BEVELLED EDGE




A bevelled edge on the boards creates a defined pattern across your floor when it's fitted. The finish gives a traditional and ordered feel to a space and the depth of the slight groove between planks will depend on the type and grade of wood you choose.



PLANED




Planed boards are finely sanded using up to six careful processes in order to create a delightfully smooth finish across the boards. Small and subtle ribbing marks are still visible from the planer for an authentic yet contemporary look.

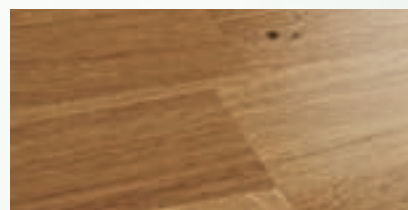

SQUARE EDGE



Fitting seamlessly together, square edged planks result in smooth, clean overall finish to your floor, and can help a room to feel bigger than it is. This finish suits modern décor very well, while the wood's clean finish takes you away to a relaxing natural setting.

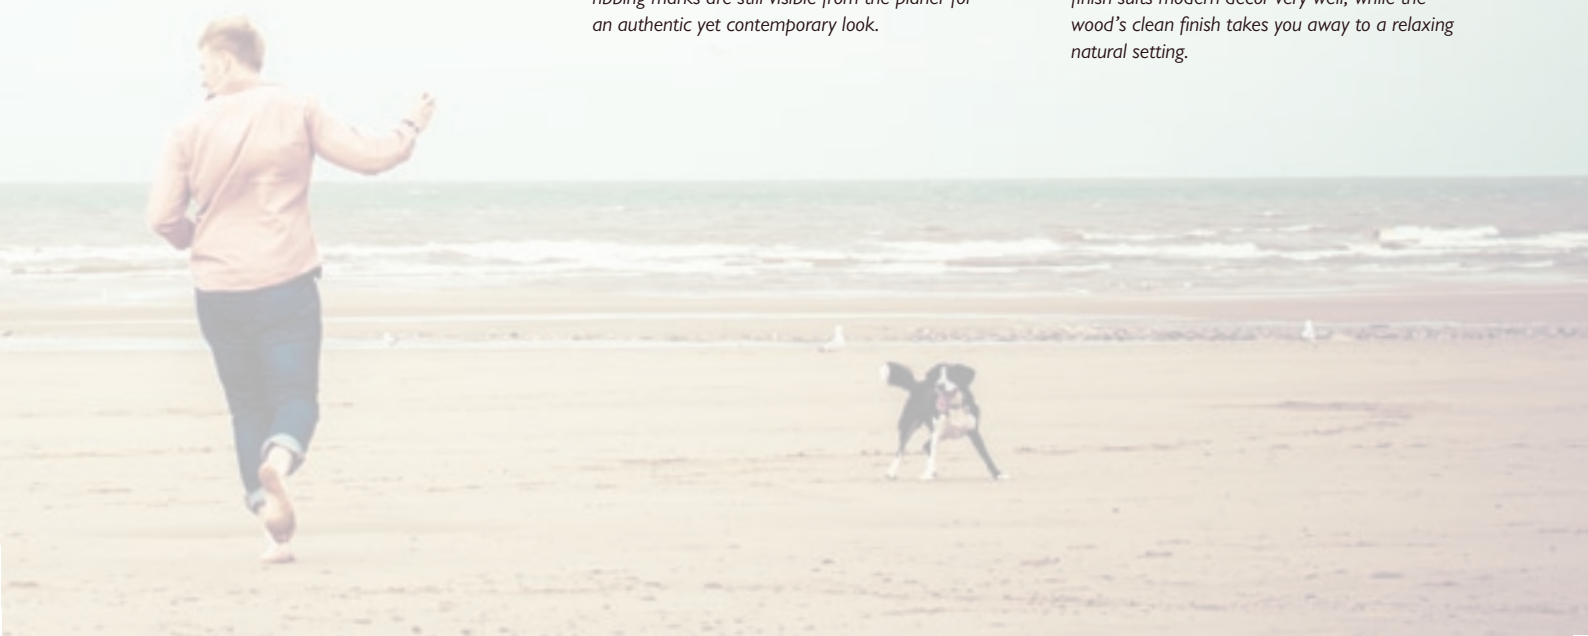

SOLID WOOD

For a naturally beautiful floor

By bringing the feel of the forest into your home, a solid wood floor not only offers strength and durability but also the tactile sensation of its natural wood texture. Once installed, it soon becomes a living, breathing part of your surroundings, radiating its warmth and feeling confident under your feet.

Our York solid wood range is made from hardwoods such as oak and walnut. The trees we use are carefully selected and harvested from responsibly managed forests in Europe or the Americas. Each board is engineered from a single piece of timber that has been carefully chosen, graded and then machined with a tongue and groove on all sides for simple, accurate fitting.

The wood's natural texture is enhanced through a range of different finishes, each of which brings out an exciting aspect of its character. Inspiring grain patterns, mellow hues, rustic textures, elegance, strength... our solid wood range offers all this and more. Browsing the following pages, you'll find flooring that evokes the colour, energy, sights and sounds of a forest setting.



The mark of
responsible forestry

All of our solid wood floors are responsibly sourced with FSC® certification.





YORK

A relaxing hollow in the woods

Our York range speaks of the timeless tranquillity of a woodland bridge, surrounded by the ancient trees of the North York Moors.

Dappling sunlight shines between leaves above, a cool bubbling emanating from the spring below as it chortles towards the rugged nearby heaths.

YORK FEATURES



18mm thick



Tongue & groove



Bevelled edges



Can be stuck down



Can be secret nailed



25 year warranty



YORK WHITE WASHED OAK

£75.95/M² (inc. VAT) | 36-YWW-150


150 x 300-1600mm | 1.98m²/pack | Rustic | Brushed & Matt Lacquered



YORK GREY WASHED OAK

£75.95/M² (inc. VAT) | 36-YGW-150

150 x 300-1600mm | 1.98m²/pack | Rustic | Brushed & Matt Lacquered

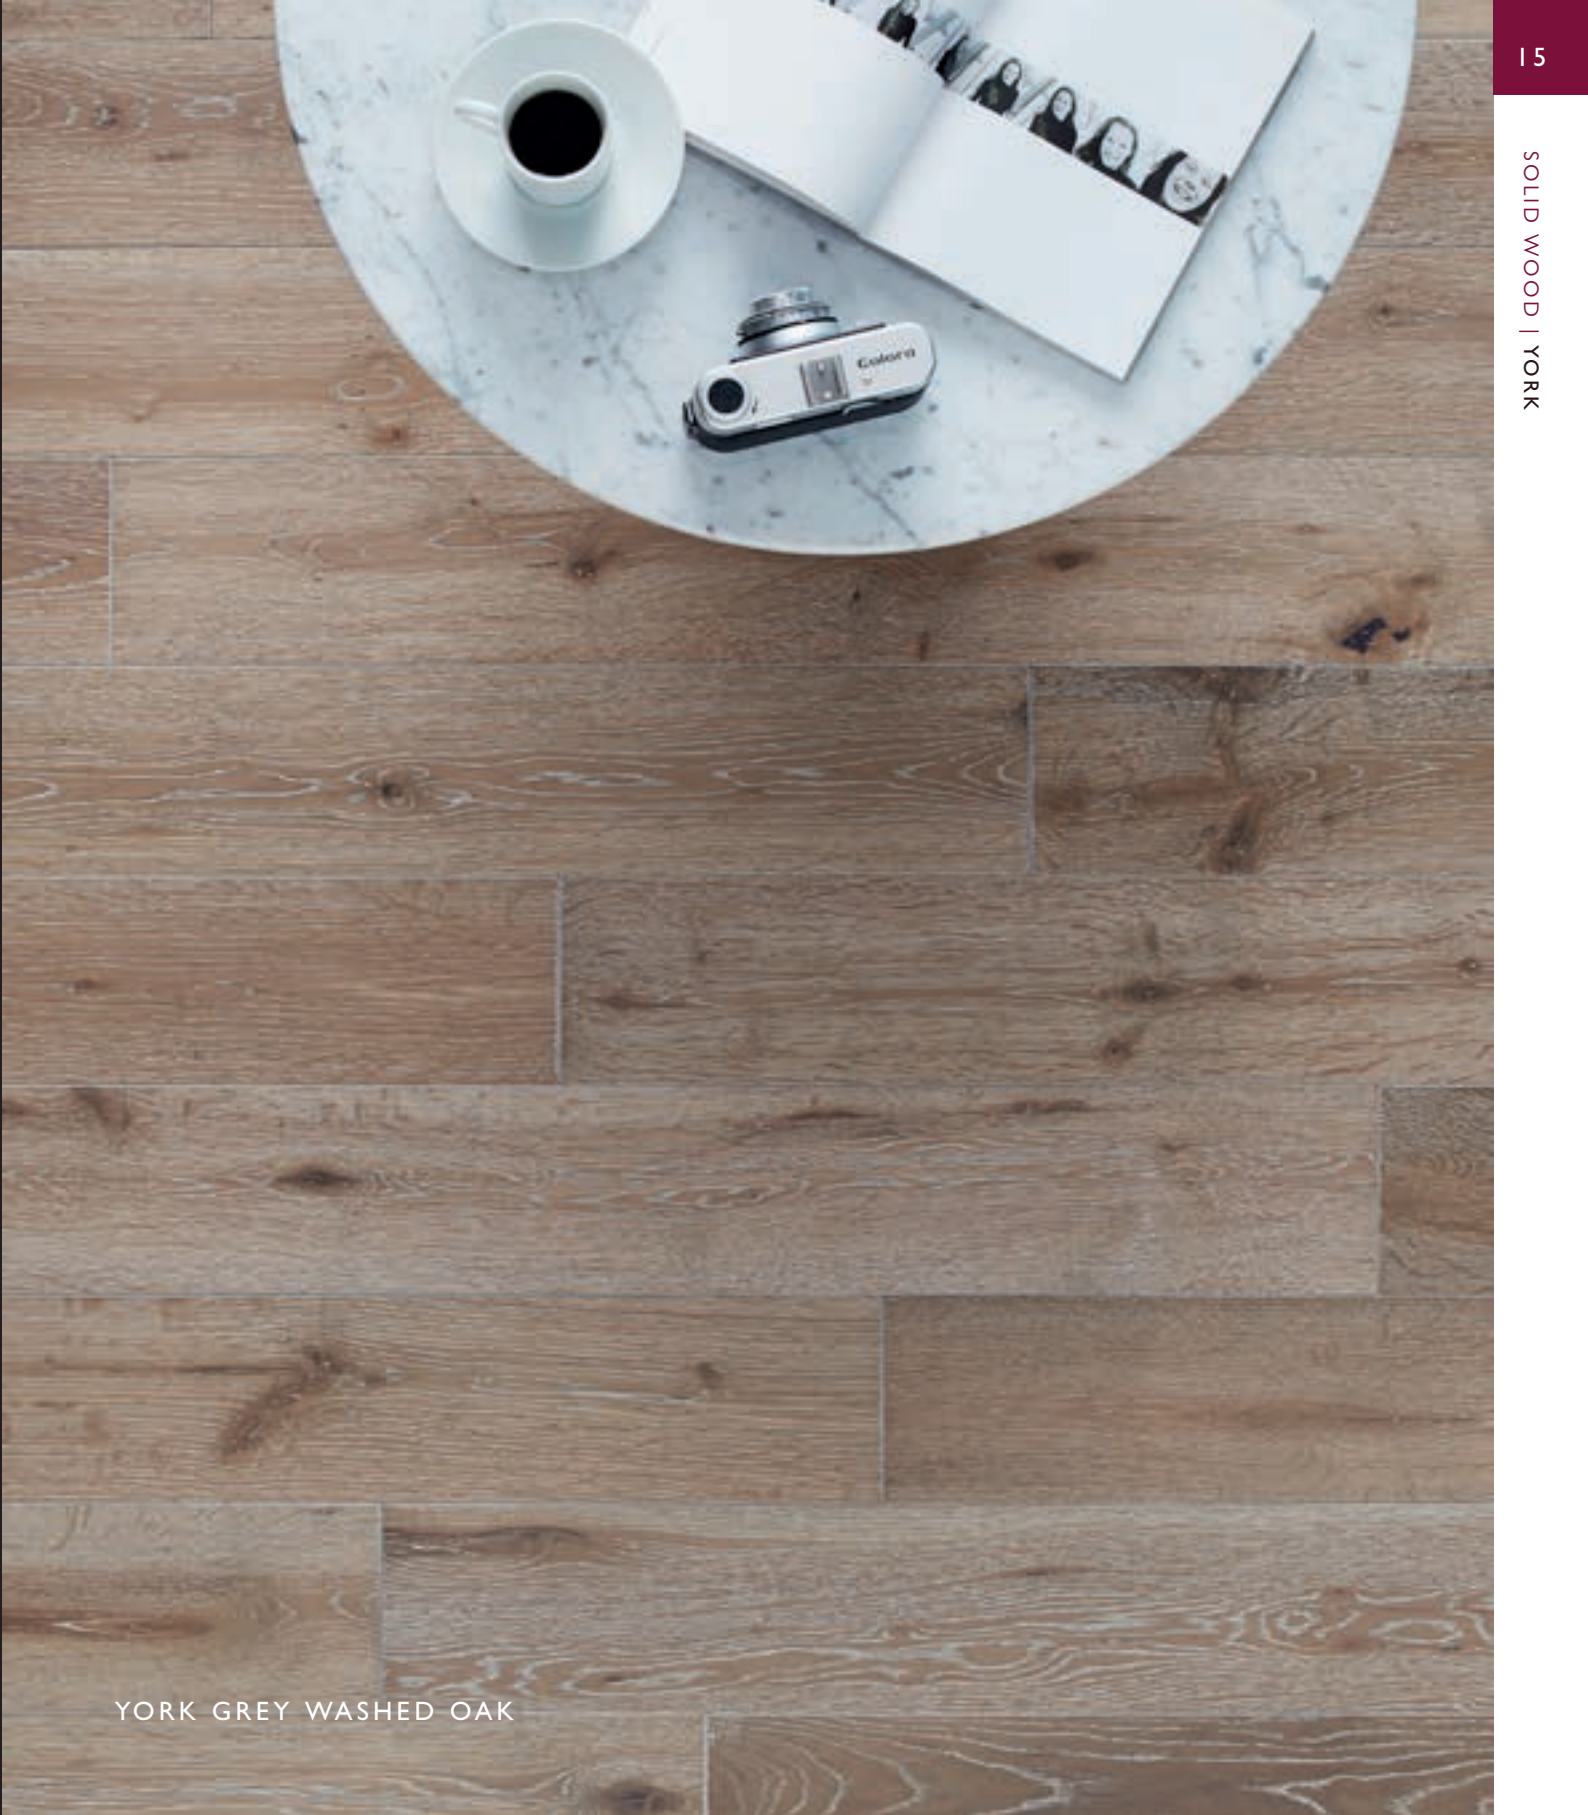

YORK GREY WASHED OAK



YORK SELECT OAK



YORK SELECT OAK

£75.95/M² (inc. VAT) | 36-YBM-150

150 x 300-1600mm | 1.98m²/pack | Select | Brushed & Matt Lacquered



YORK RUSTIC OAK

£64.95/M² (inc. VAT) | 36-YRO-150

150 x 300-1600mm | 1.98m²/pack | Rustic | Oiled

£64.95/M² (inc. VAT) | 36-YOR-150

150 x 300-1600mm | 1.98m²/pack | Rustic | Lacquered

BE INSPIRED

See more images and get **free samples**
at www.woodpeckerflooring.co.uk



HANDSCRAPED TO AGED PERFECTION

York Antique Oak is painstakingly handscraped for a finish that brings a whole new dimension to your natural floor. Creating a surface with undulating ridges and grooves, handscraping adds depth and definition to the wood, capturing an aged look that's distinctive by eye yet smooth to the touch.



YORK WALNUT

£100.95/M² (inc. VAT) | 36-YWR-001

130 x 300-1500mm | 2.29m²/pack | Rustic | Matt Lacquered



YORK ANTIQUE OAK

£75.95/M² (inc. VAT) | 36-YOA-150

150 x 300-1600mm | 1.98m²/pack | Rustic | Matt Lacquered

See page 14 for more York features



YORK ANTIQUE OAK

ENGINEERED WOOD

Bringing out the best in the wood

To the naked eye, engineered wood flooring has all the natural beauty of solid wood. Intriguing textures, rich and subtle colours, and gorgeous finishes are all present and correct. However, the boards are constructed in a way that makes them more versatile, and more practical, in today's home.

With central or underfloor heating, solid wood floors can easily dry out and become warped. They are susceptible to expansion and contraction too. Engineered flooring is designed to overcome such problems. Our wood is still carefully selected from responsibly managed sources, but it's cut and formed into three layers. The top layer provides the unique texture and strength of natural wood, a central core of softwood, high density fibreboard or plywood adds stability, and there's a veneer underneath for balance. The resulting boards are gorgeous, and long lasting.

An engineered construction with just a top layer of real wood also helps the tree to go further, extending the resources available while providing a more stable floor. Meanwhile, our passion for wood's natural qualities drives the finishing process. Our five ranges of engineered wood flooring each aim to capture a unique aspect of Britain's natural environments while also reflecting our commitment to quality and affordability.



The mark of
responsible forestry

All of our engineered floors are responsibly sourced with FSC® certification.





SALCOMBE

Peaceful and invigorating

There's nothing like soft, forgiving sand underfoot as you run towards a lapping tide, the breeze in your face and the fresh scent of sea spray on the air. This range takes inspiration from the sumptuous beach and placid waters of the Salcombe estuary.

SALCOMBE FEATURES



14mm thick



3mm wear layer



Easiloc joint



*Bevelled
edges*



*Can
be floated*



*Suitable for
underfloor heating*



*25 year
warranty*



SALCOMBE CHALKED OAK

£68.95/M² (inc. VAT) | 45-WAW-020

190 x 1860mm | 2.81m²/pack | Rustic | Brushed & Matt Lacquered



SALCOMBE SANDY OAK

£68.95/M² (inc. VAT) | 45-WAP-019

190 x 1860mm | 2.81m²/pack | Rustic | Brushed & Matt Lacquered





SALCOMBE SEASHORE OAK

BE INSPIRED

See more images and get **free samples**
at www.woodpeckerflooring.co.uk



**SALCOMBE
SEASHORE OAK**

£68.95/M² (inc. VAT) | 45-WDG-013

190 x 1860mm | 2.81m²/pack | Rustic | Brushed & Matt Lacquered



**SALCOMBE
SUNWASHED OAK**

£68.95/M² (inc. VAT) | 45-WAG-015

190 x 1860mm | 2.81m²/pack | Rustic | Brushed & Matt Lacquered

See page 24 for more Salcombe features



**SALCOMBE
DUNE OAK**

£68.95/M² (inc. VAT) | 45-WGR-016

190 x 1860mm | 2.81m²/pack | Rustic | Brushed & Matt Lacquered



**SALCOMBE
MOONBEAM OAK**

£68.95/M² (inc. VAT) | 45-WAB-014


190 x 1860mm | 2.81m²/pack | Rustic | Brushed & Matt Lacquered



**SALCOMBE
HARBOUR OAK**

£68.95/M² (inc. VAT) | 45-WAB-018

190 x 1860mm | 2.81m²/pack | Rustic | Brushed & Matt Lacquered

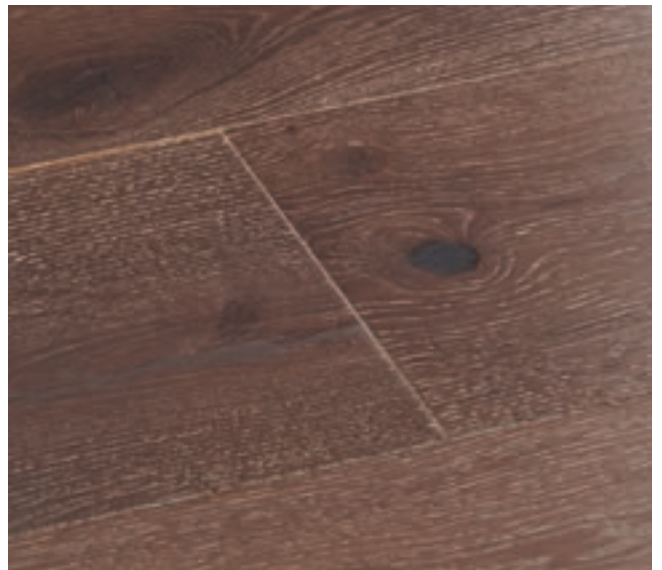

**SALCOMBE
SHADOW OAK**

£68.95/M² (inc. VAT) | 45-WAC-017

190 x 1860mm | 2.81m²/pack | Rustic | Brushed & Matt Lacquered

See page 24 for more Salcombe features



SALCOMBE MOONBEAM OAK



SALCOMBE NATURAL OAK



SALCOMBE NATURAL OAK 3-STRIP

£48.95/M² (inc. VAT) | 46-WOU-003

182 x 2190mm | 3.587m²/pack | Rustic | Lacquered



SALCOMBE NATURAL OAK

£68.95/M² (inc. VAT) | 45-WGO-000

190 x 1860mm | 2.81m²/pack | Rustic | Brushed & Matt Lacquered





HARLECH

A crisp and comfortable feel

Imagine a barefoot stroll on crackling leaves, as you make your way towards the refreshing seaside at Harlech, in North Wales. The white capped peak of Mount Snowdon behind you, waves breaking onto the light sands ahead, a peaceful rest awaits...

HARLECH FEATURES



15mm thick



4mm wear layer



Tongue & groove



Bevelled edges



Can be floated



Can be stuck down



Can be secret nailed



Suitable for underfloor heating if fully stuck down



25 year warranty



HARLECH WHITE OILED OAK

£71.95/M² (inc. VAT) | 35-HWO-148

148 x 1860mm | 1.65m²/pack | Rustic | Oiled

£74.95/M² (inc. VAT) | 35-HWO-189

189 x 1860mm | 2.1m²/pack | Rustic | Oiled



HARLECH MISTED OAK

£74.95/M² (inc. VAT) | 35-HMI-001

189 x 1860mm | 2.1m²/pack | Rustic | Brushed & Matt Lacquered



HARLECH MISTED OAK



HARLECH RAW OAK



HARLECH RAW OAK

£74.95/M² (inc. VAT) | 35-HRA-001

189 x 1860mm | 2.1m²/pack | Rustic | Brushed & Matt Lacquered

£89.95/M² (inc. VAT) | 35-HRA-240

240 x 2200mm | 2.1m²/pack | Rustic | Brushed & Matt Lacquered



HARLECH WHITE SMOKED OAK

£74.95/M² (inc. VAT) | 35-HWS-001

148 x 1860mm | 1.65m²/pack | Rustic | Brushed & Matt Lacquered

£89.95/M² (inc. VAT) | 35-HWS-240

240 x 2200mm | 2.1m²/pack | Rustic | Brushed & Matt Lacquered

I am
smoked.
See p.7

NATURALLY INSPIRED WALLS

Bring nature home and create a stunning feature with Woodpecker on your walls. Any of the floors in our Harlech, Berkeley or Chepstow collections can be clad onto the wall using our handy clips. Find out more on page 114.



HARLECH SELECT OAK

£77.95/M² (inc. VAT) | 35-HOO-005

189 x 1860mm | 2.1m²/pack | Select | Oiled

£77.95/M² (inc. VAT) | 35-HOL-001

189 x 1860mm | 2.1m²/pack | Select | Lacquered

CAREFULLY CHOSEN

Harlech Select Oak boards are carefully chosen for their few, small knots. The effect is a natural yet consistent floor with less rustic character. Perfect for a contemporary feel.



HARLECH RUSTIC OAK

£62.95/M² (inc. VAT) | 35-HOC-148

148 x 1860mm | 1.65m²/pack | Rustic | Oiled

£66.95/M² (inc. VAT) | 35-HRO-001

189 x 1860mm | 2.1m²/pack | Rustic | Oiled

£67.95/M² (inc. VAT) | 35-HOB-001

148 x 1860mm | 1.65m²/pack | Rustic | Brushed & Matt Lacquered

£86.95/M² (inc. VAT) | 35-HRO-240

240 x 2200mm | 2.1m²/pack | Rustic | Brushed & Matt Lacquered



HARLECH RUSTIC OAK



HARLECH STORMY OAK



HARLECH SMOKED OAK

£71.95/M² (inc. VAT) | 35-HSO-001

189 x 1860mm | 2.1m²/pack | Rustic | Oiled



HARLECH COGNAC OAK

£74.95/M² (inc. VAT) | 35-HOC-001


148 x 1860mm | 1.65m²/pack | Rustic | Brushed & Matt Lacquered



HARLECH WALNUT

£98.95/M² (inc. VAT) | 35-HWL-001

148 x 1860mm | 1.65m²/pack | Rustic | Matt Lacquered

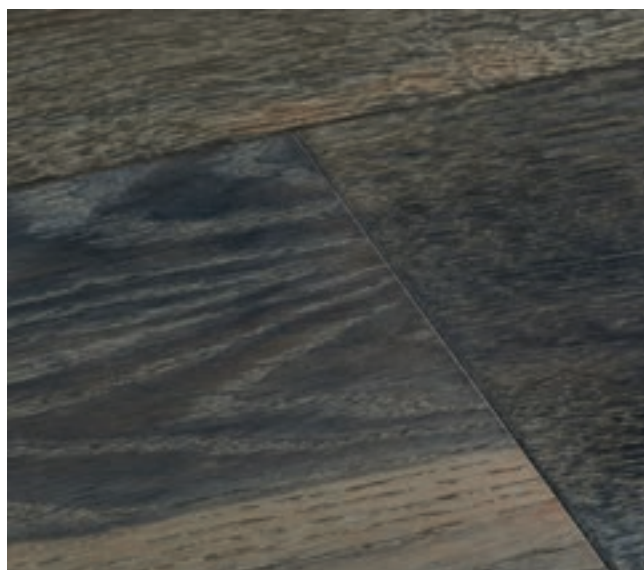

HARLECH STORMY OAK

£74.95/M² (inc. VAT) | 35-HWG-001

189 x 1860mm | 2.1m²/pack | Rustic | Brushed & Matt Lacquered



See page 34 for more Harlech features

BE INSPIRED

See more images and get **free samples**
at www.woodpeckerflooring.co.uk



HARLECH CHOCOLATE OAK

£74.95/M² (inc. VAT) | 35-HCW-001

189 x 1860mm | 2.1m²/pack | Rustic | Brushed & Matt Lacquered



HARLECH TWILIGHT OAK

£74.95/M² (inc. VAT) | 35-HTW-001

189 x 1860mm | 2.1m²/pack | Rustic | Brushed & Matt Lacquered

See page 34 for more Harlech features



HARLECH TWILIGHT OAK





BERKELEY

Smoothed by thousands of feet

Splashed by spring water since the beginning of time, the stones are smooth and rounded, as though polished by a thousand footfalls. They're sleek to the touch as you clamber along the water's edge in one of England's oldest remaining woodlands near Berkeley, Gloucestershire...

BERKELEY FEATURES



15mm thick



4mm wear layer



Tongue & groove



25 year warranty



Bevelled edges



Suitable for underfloor heating if fully stuck down



Can be floated



Can be stuck down



Can be secret nailed



HANDSCRAPED TO AGED PERFECTION

All Berkeley floors are painstakingly handscraped for a finish that brings a whole new dimension to your natural floor. Creating a surface with undulating ridges and grooves, handscraping adds depth and definition to the wood, capturing an aged look that's distinctive by eye yet smooth to the touch.



BERKELEY WHITE OAK

£87.95/M² (inc. VAT) | 38-BWO-005

190 x 1860mm | 2.11m²/pack | Extra Rustic | Oiled



BERKELEY MONTANA OAK

£87.95/M² (inc. VAT) | 38-BOM-001

190 x 1860mm | 2.11m²/pack | Extra Rustic | Oiled



BERKELEY WHITE OAK



BERKELEY GREY OAK

EXTRA RUSTIC BEAUTY

Berkeley floors have extra rustic grading with large knots, splits and cracks featuring in the boards. Striking streaks of dark filler can be found in these designs, along with a multi-tonal appearance for a really distinctive look.



BERKELEY GREY OAK

£87.95/M² (inc. VAT) | 38-BAG-001

190 x 1860mm | 2.11m²/pack | Extra Rustic | Oiled



BERKELEY WASHED OAK

£87.95/M² (inc. VAT) | 38-BOW-002

190 x 1860mm | 2.11m²/pack | Extra Rustic | Oiled

See page 46 for more Berkeley features



BERKELEY NATURAL OAK

£87.95/M² (inc. VAT) | 38-BON-004

190 x 1860mm | 2.11m²/pack | Extra Rustic | Oiled



BERKELEY COTTAGE OAK

£87.95/M² (inc. VAT) | 38-BDW-001


190 x 1860mm | 2.11m²/pack | Extra Rustic | Oiled



BERKELEY SMOKED OAK

£87.95/M² (inc. VAT) | 38-BOS-003

190 x 1860mm | 2.11m²/pack | Extra Rustic | Oiled

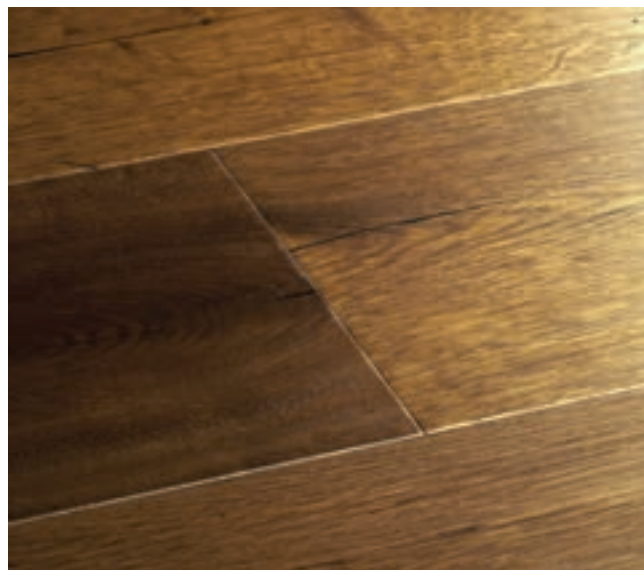

BERKELEY BURNT OAK

£87.95/M² (inc. VAT) | 38-BOA-006

190 x 1860mm | 2.11m²/pack | Extra Rustic | Oiled

See page 46 for more Berkeley features



BERKELEY COTTAGE OAK



BERKELEY CELLAR OAK

WONDERFULLY WORN AND RECLAIMED

Berkeley Rugged Oak and Cellar Oak capture the exciting look and feel of real reclaimed timber. Along with the extra rustic character that's a staple of the Berkeley collection, these floors feature realistic marks, scuffs and dents that tell the story of antique wood that's wonderfully worn over time. Each board is lovingly distressed by hand with something different to be found in every piece.



BERKELEY RUGGED OAK

£87.95/M² (inc. VAT) | 38-BRO-001

190 x 1860mm | 2.11m²/pack | Extra Rustic | Oiled



BERKELEY CELLAR OAK

£87.95/M² (inc. VAT) | 38-BCO-001

190 x 1860mm | 2.11m²/pack | Extra Rustic | Oiled

See page 46 for more Berkeley features





GOODRICH

Classic craftsmanship never diminishes

Like the ancient art of dry stone walling, our parquet flooring is created with both natural form and long-lasting function. Laid to stand the test of time, it gets better with the memories of each footstep that's taken across its intricate patterns.

GOODRICH FEATURES



15mm thick



4mm wear layer



Tongue & groove



25 year warranty



Bevelled edges



Can be floated



Can be stuck down



Can be secret nailed




Suitable for underfloor heating if fully stuck down



GOODRICH COTTON OAK

£83.95/M² (inc. VAT) | 32-GCT-001

90 x 400mm | 1.296m²/pack | Rustic | Brushed & Matt Lacquered

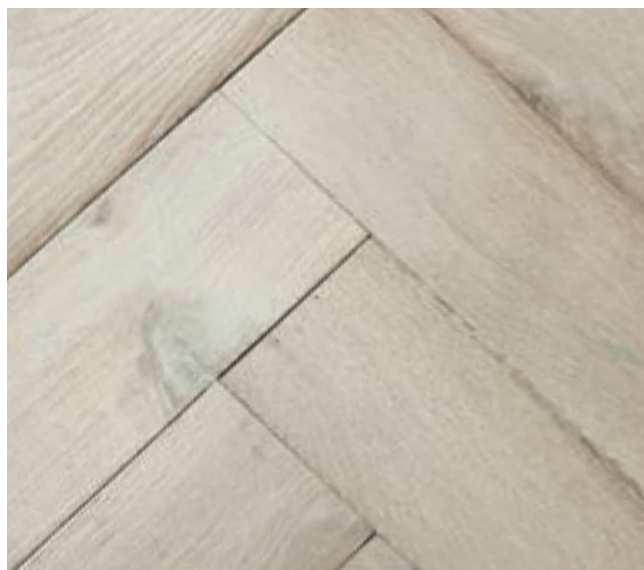

GOODRICH WHITENED OAK

£83.95/M² (inc. VAT) | 32-GWH-001

90 x 400mm | 1.296m²/pack | Rustic | Brushed & Matt Lacquered



GOODRICH WHITENED OAK



GOODRICH HAZE OAK



GOODRICH HAZE OAK

£105.95/M² (inc. VAT) | 32-CGR-001

90 x 400mm | 1.296m²/pack | Rustic | Brushed & Matt Lacquered



GOODRICH FEATHER OAK

£83.95/M² (inc. VAT) | 32-OGW-001

90 x 400mm | 1.296m²/pack | Rustic | Brushed & Matt Lacquered



GOODRICH SALTED OAK

£83.95/M² (inc. VAT) | 32-SGR-001

90 x 400mm | 1.296m²/pack | Rustic | Brushed & Matt Lacquered

See page 56 for more Goodrich features

BE INSPIRED

See more images and get **free samples**
at www.woodpeckerflooring.co.uk



GOODRICH ECRU OAK

£83.95/M² (inc. VAT) | 32-GEO-001

90 x 400mm | 1.296m²/pack | Rustic | Brushed & Matt Lacquered



GOODRICH ASH OAK

£83.95/M² (inc. VAT) | 32-GAS-001

90 x 400mm | 1.296m²/pack | Rustic | Brushed & Matt Lacquered

See page 56 for more Goodrich features



GOODRICH ASH OAK



GOODRICH TRUFFLE OAK



GOODRICH NATURAL OAK

£83.95/M² (inc. VAT) | 32-GNA-001

90 x 400mm | 1.296m²/pack | Rustic | Brushed & Matt Lacquered



GOODRICH COFFEE OAK

£83.95/M² (inc. VAT) | 32-GCO-001


90 x 400mm | 1.296m²/pack | Rustic | Brushed & Matt Lacquered



GOODRICH TRUFFLE OAK

£83.95/M² (inc. VAT) | 32-GSC-001

90 x 400mm | 1.296m²/pack | Rustic | Brushed & Matt Lacquered

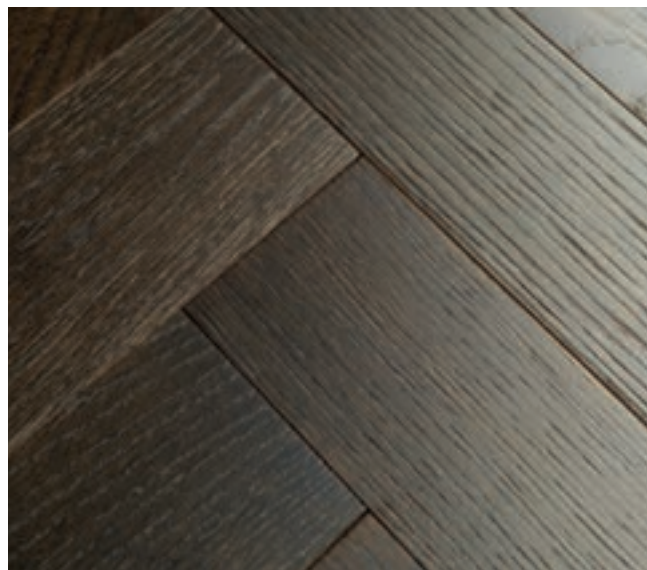

GOODRICH ESPRESSO OAK

£83.95/M² (inc. VAT) | 32-GCW-001

90 x 400mm | 1.296m²/pack | Rustic | Brushed & Matt Lacquered

See page 56 for more Goodrich features





CHEPSTOW

Bold and enticing natural textures

The gnarled old bark of the fallen tree, splodged occasionally with bright green lichen, is as interesting to see as it is to touch. With a little imagination it becomes like the skin of an ancient Welsh dragon asleep for generations in an ancient Monmouthshire wood.

CHEPSTOW FEATURES



21mm thick



6mm wear layer



Tongue & groove



25 year warranty



Bevelled edges



Can be floated



Can be stuck down



Can be secret nailed



Suitable for underfloor heating if fully stuck down



CHEPSTOW PLANED WHITENED OAK

£97.95/M² (inc. VAT) | 65-POW-001

189 x 1860mm | 2.11m²/pack | Rustic | Hardwax Oiled



CHEPSTOW VANILLA OAK

£97.95/M² (inc. VAT) | 65-PVA-001

189 x 1860mm | 2.11m²/pack | Rustic | Hardwax Oiled



CHEPSTOW VANILLA OAK



CHEPSTOW CALICO OAK



CHEPSTOW PLANED GREY OAK

£97.95/M² (inc. VAT) | 65-POG-001

189 x 1860mm | 2.11m²/pack | Rustic | Hardwax Oiled



CHEPSTOW SAWN GREY OAK

£125.95/M² (inc. VAT) | 65-SOG-001

189 x 1860mm | 2.11m²/pack | Rustic | Hardwax Oiled

I am sawn.
See p.9



CHEPSTOW WASHED OAK

£97.95/M² (inc. VAT) | 65-RWA-001

190 x 1900mm | 1.444m²/pack | Rustic | Hardwax Oiled

I am
smoked.
See p.7



CHEPSTOW CALICO OAK

£115.95/M² (inc. VAT) | 65-PCA-001

189 x 1860mm | 2.11m²/pack | Rustic | Hardwax Oiled

See page 66 for more Chepstow features



CHEPSTOW RUSTIC OAK

£83.95/M² (inc. VAT) | 65-HMU-001

189 x 1860mm | 2.11m²/pack | Rustic | Unfinished

£89.95/M² (inc. VAT) | 65-HML-001

189 x 1860mm | 2.11m²/pack | Rustic | Matt Lacquered

£89.95/M² (inc. VAT) | 65-HBO-001

189 x 1860mm | 2.11m²/pack | Rustic | Brushed & Oiled

£104.95/M² (inc. VAT) | 65-HBO-002

240 x 2200mm | 2.11m²/pack | Rustic | Brushed & Oiled

BE INSPIRED

See more images and get **free samples**
at www.woodpeckerflooring.co.uk



CHEPSTOW RUSTIC OAK



CHEPSTOW CHARCOAL OAK



CHEPSTOW DISTRESSED NATURAL OAK

£115.95/M² (inc. VAT) | 65-AON-001

190 x 1900mm | 1.444m²/pack | Rustic | Hardwax Oiled

*I have
distressed
bevels. See
p.9*



CHEPSTOW PLANED ANTIQUE OAK

£97.95/M² (inc. VAT) | 65-POA-001

189 x 1860mm | 2.11m²/pack | Rustic | Hardwax Oiled



CHEPSTOW DISTRESSED CHARCOAL OAK

£115.95/M² (inc. VAT) | 65-AOC-001

190 x 1900mm | 1.444m²/pack | Rustic | Hardwax Oiled

*I have
distressed
bevels. See
p.9*


See page 66 for more Chepstow features



CHEPSTOW PLANED
COCOA OAK

£97.95/M² (inc. VAT) | 65-POC-001

189 x 1860mm | 2.11m²/pack | Rustic | Hardwax Oiled

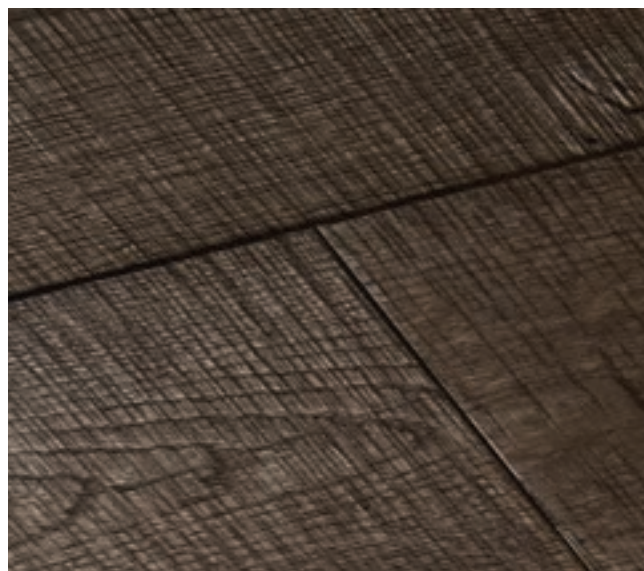


CHEPSTOW SAWN
BRONZED OAK

£125.95/M² (inc. VAT) | 65-SOB-001

189 x 1860mm | 2.11m²/pack | Rustic | Hardwax Oiled

I am sawn.
See p.9

See page 66 for more Chepstow features



CHEPSTOW COCOA OAK

BAMBOO

Totally natural feel, tough as steel

Bamboo is one of the most sustainable materials you'll ever come across. When it's mature, we cut it for use and a new harvest replenishes in just five years. Although it's not strictly speaking a wood – bamboo is a family of grass – it forms its own unique grain patterns and can be worked into extremely hardwearing floorboards, with the natural look and qualities of hardwood.

At Woodpecker, we use the strand weaving technique to turn bamboo into boards. This involves compressing bamboo fibres together under heat and pressure to form boards with the tensile strength of steel.

The range of colours and styles available in our bamboo range means there's a product to suit just about any décor scheme. Each board is prefinished with five coats of UV scratch resistant lacquer and has a glueless clic system, making them just as easy to install as any other wood floor we make.



The mark of
responsible forestry

All of our bamboo floors are responsibly sourced with FSC® certification.





OXWICH

Each piece is unique and captivating

Formed in the forest, felled for whatever reason, used, discarded, and worn by the waves. Driftwood is one of nature's marvels, and no two pieces are the same. Oxwich Bay is a treasure trove for driftwood hunters and gives impetus to our Oxwich range.

OXWICH FEATURES



12mm thick



Easiloc joint



*Bevelled
edges*



*Can
be floated*



*Suitable for
underfloor heating if
fully stuck down*



*25 year
warranty*



OXWICH NATURAL STRAND BAMBOO

£69.95/M² (inc. VAT) | 20-SWN-001

135 x 1850mm | 1.498m²/pack | Matt Lacquered



OXWICH COFFEE STRAND BAMBOO

£69.95/M² (inc. VAT) | 20-SWC-001

135 x 1850mm | 1.498m²/pack | Matt Lacquered



OXWICH NATURAL STRAND BAMBOO



OXWICH WHITEWASH STRAND BAMBOO

BE INSPIRED


See more images and get **free samples**
at www.woodpeckerflooring.co.uk



OXWICH WHITEWASH STRAND BAMBOO

£73.95/M² (inc. VAT) | 20-SWH-001

135 x 1850mm | 1.498m²/pack | Lacquered

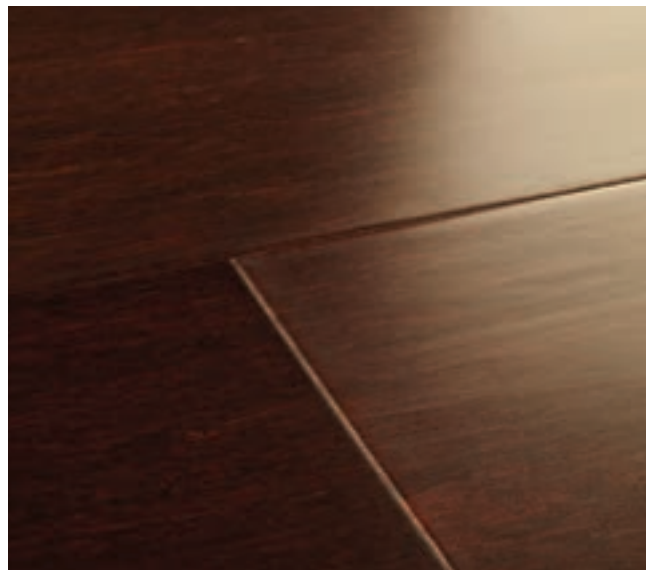

OXWICH SADDLE STRAND BAMBOO

£73.95/M² (inc. VAT) | 20-SSA-001

135 x 1850mm | 1.498m²/pack | Lacquered

See page 80 for more Oxwich features

LAMINATE

Authentic, hardwearing and affordable

Laminate flooring looks just like real wood, but the latest manufacturing techniques mean that it's tough, scratch resistant and long lasting. It's also very affordable compared to an all-wood product.

Simulating the appearance of real wood, laminate floors have a printed foil surface showing a wood grain pattern, covered in a tough, transparent wearing layer. Essentially a man-made solution, laminate flooring has a high-density core made from a compound of natural materials, making it strong, stable and flexible. The Easiloc joint system of our laminate ranges makes the floor easy to fit, without the need for glue.

Woodpecker laminate floors come in a wide variety of colours and styles that have all the character of natural wood. From clean and contemporary whitewashed boards to rustic and rural-inspired designs, there's something to suit every preference and decorative theme.



All of our Wembury laminate floors are responsibly sourced with PEFC certification.





WEMBURY

Stepping stones to a brighter future

True to its Devonshire seaside namesake, our Wembury range offers a relaxing retreat to everyone. At the beach you can leave your footprints on the time-worn smooth rocks as you exit the sea, and explore the endless rock pools.

WEMBURY FEATURES



8mm thick



Easiloc joint



Can
be floated



Suitable for
underfloor heating



25 year
warranty



AC4 wear
rating



Embossed
grain pattern



Bevelled
edges



WEMBURY LINEN OAK

£24.95/M² (inc. VAT) | 28-OSI-238

193 x 1291mm | 1.99m²/pack



WEMBURY COCONUT OAK

£24.95/M² (inc. VAT) | 28-OSI-262

193 x 1291mm | 1.99m²/pack



WEMBURY COCONUT OAK



WEMBURY FROSTED OAK



**WEMBURY
POLAR PINE**

£24.95/M² (inc. VAT) | 28-OSI-271

193 x 1291mm | 1.99m²/pack



**WEMBURY
FROSTED OAK**

£24.95/M² (inc. VAT) | 28-OSI-270

193 x 1291mm | 1.99m²/pack



**WEMBURY
WINTER OAK**

£24.95/M² (inc. VAT) | 28-OSI-211

327 x 1291mm | 2.53m²/pack



**WEMBURY
COASTAL OAK**

£24.95/M² (inc. VAT) | 28-OSI-241

193 x 1291mm | 1.99m²/pack

See page 88 for more Wembury features



**WEMBURY
BISCUIT OAK**

£24.95/M² (inc. VAT) | 28-OSI-263

193 x 1291mm | 1.99m²/pack



**WEMBURY
NORDIC OAK**

£24.95/M² (inc. VAT) | 28-OSI-261

193 x 1291mm | 1.99m²/pack



**WEMBURY
WILD OAK**

£24.95/M² (inc. VAT) | 28-OSI-264

193 x 1291mm | 1.99m²/pack



**WEMBURY
DRIFTWOOD**

£24.95/M² (inc. VAT) | 28-OSI-259

193 x 1291mm | 1.99m²/pack

See page 88 for more Wembury features



WEMBURY NORDIC OAK



WEMBURY DESERT PINE



WEMBURY HARVEST OAK

£24.95/M² (inc. VAT) | 28-OSI-275

193 x 1291mm | 1.99m²/pack



WEMBURY DESERT PINE

£24.95/M² (inc. VAT) | 28-OSI-272

193 x 1291mm | 1.99m²/pack



WEMBURY NATURAL OAK

£24.95/M² (inc. VAT) | 28-OSI-244

193 x 1291mm | 1.99m²/pack



WEMBURY SPRING OAK

£24.95/M² (inc. VAT) | 28-OSI-210

327 x 1291mm | 2.53m²/pack

See page 88 for more Wembury features



**WEMBURY
COTSWOLD OAK**

£24.95/M² (inc. VAT) | 28-OSI-246

193 x 1291mm | 1.99m²/pack



**WEMBURY
AUTUMN OAK**

£24.95/M² (inc. VAT) | 28-OSI-212

327 x 1291mm | 2.53m²/pack



**WEMBURY
HONEY OAK**

£24.95/M² (inc. VAT) | 28-OSI-273

246 x 1291mm | 2.54m²/pack



**WEMBURY
DUSKY OAK**

£24.95/M² (inc. VAT) | 28-OSI-274

246 x 1291mm | 2.54m²/pack

See page 88 for more Wembury features



WEMBURY HONEY OAK





BRECON

Fresh and beautiful

Brecon's waterfall-splashed woodlands are fresh and enduring, just like our Brecon range. Stroll along mountainous rims of blowing heather and descend into green, rural valleys. Adventurous landscapes inspire these designs.

BRECON FEATURES



5mm thick



Easiloc joint



Can
be floated



Suitable for
underfloor heating



25 year
warranty



AC4 wear
rating



Embossed
grain pattern



Moisture resistant

BEAUTIFULLY PRACTICAL

Brecon floors are moisture resistant making them a practical option for kitchens, bathrooms or any other room in the home (except wetrooms). With a very hardwearing surface, they're also great with children or pets, and in high-footfall areas.



BRECON IVORY OAK

£39.95/m² (inc. VAT) | 29-BRE-007

180 x 1220mm | 2.2m²/pack



BRECON BARLEY OAK

£39.95/m² (inc. VAT) | 29-BRE-006

180 x 1220mm | 2.2m²/pack



BRECON BARLEY OAK



BRECON WAREHOUSE OAK



**BRECON
DOVE OAK**

£39.95/m² (inc. VAT) | 29-BRE-005


180 x 1220mm | 2.2m²/pack



**BRECON
SEASHELL OAK**

£39.95/m² (inc. VAT) | 29-BRE-009

180 x 1220mm | 2.2m²/pack

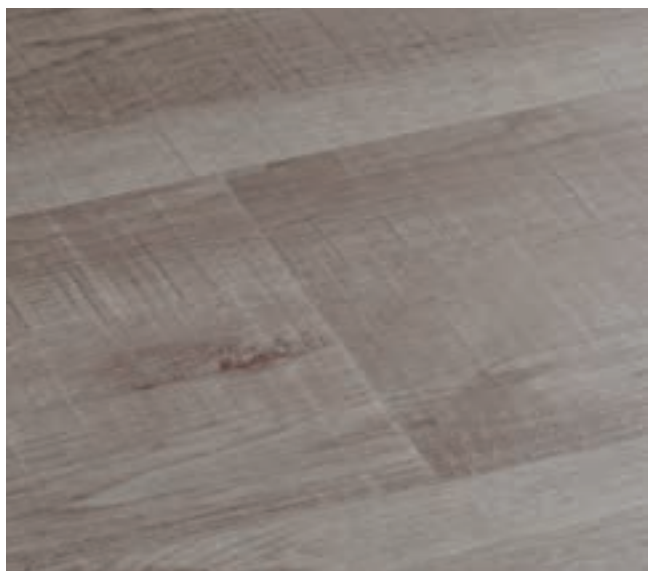

**BRECON
WAREHOUSE OAK**

£39.95/m² (inc. VAT) | 29-BRE-012

180 x 1220mm | 2.2m²/pack



**BRECON
WHISPER OAK**

£39.95/m² (inc. VAT) | 29-BRE-011

180 x 1220mm | 2.2m²/pack

See page 100 for more Brecon features



**BRECON
RIVER OAK**

£39.95/m² (inc. VAT) | 29-BRE-002


180 x 1220mm | 2.2m²/pack



**BRECON
RUSSET OAK**

£39.95/m² (inc. VAT) | 29-BRE-013


180 x 1220mm | 2.2m²/pack

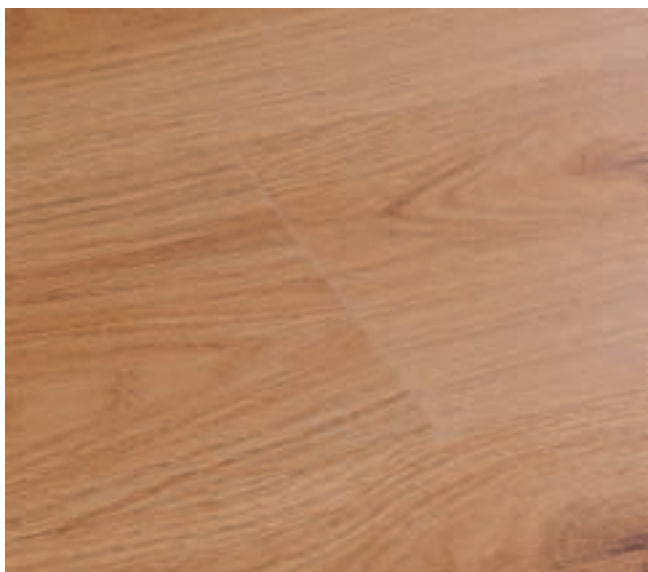

**BRECON
FARM OAK**

£39.95/m² (inc. VAT) | 29-BRE-003

180 x 1220mm | 2.2m²/pack

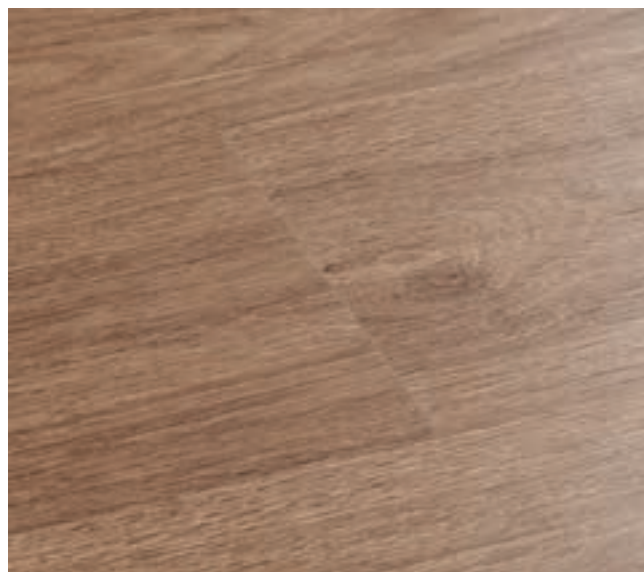

**BRECON
FAWN OAK**

£39.95/m² (inc. VAT) | 29-BRE-008

180 x 1220mm | 2.2m²/pack

See page 100 for more Brecon features




BRECON FARM OAK



BRECON MONO OAK

BE INSPIRED


See more images and get **free samples**
at www.woodpeckerflooring.co.uk

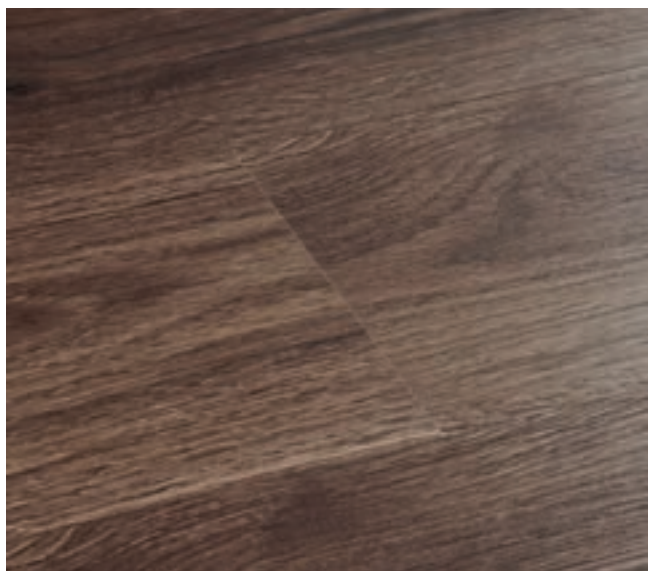

BRECON TOASTED OAK

£39.95/m² (inc. VAT) | 29-BRE-004

180 x 1220mm | 2.2m²/pack

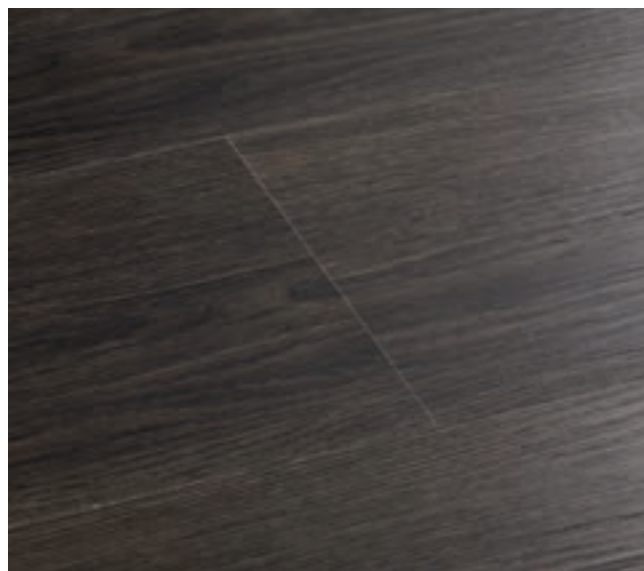

BRECON MONO OAK

£39.95/m² (inc. VAT) | 29-BRE-001

180 x 1220mm | 2.2m²/pack

See page 100 for more Brecon features

THE RANGE AT A GLANCE

YORK	CODE	PRICE (inc. vat)	THICKNESS	DIMENSIONS	PACK SIZE	GRADE	FINISH	JOINT TYPE	EDGES	FIXING METHOD	UNDERFLOOR HEATING	HARDNESS	TOG RATING
WHITE WASHED OAK	36-YWW-150	£75.95/m ²	18mm	150 x 300- 1600mm*	1.98m ² Variable no.	Rustic	B & M Lacquered	Tongue & Groove	Bevelled	Stuck down or nailed	Not Suitable	Hard	N/A
GREY WASHED OAK	36-YGW-150	£75.95/m ²	18mm	150 x 300- 1600mm*	1.98m ² Variable no.	Rustic	B & M Lacquered	Tongue & Groove	Bevelled	Stuck down or nailed	Not Suitable	Hard	N/A
SELECT OAK	36-YBM-150	£75.95/m ²	18mm	150 x 300- 1600mm*	1.98m ² Variable no.	Select	B & M Lacquered	Tongue & Groove	Bevelled	Stuck down or nailed	Not Suitable	Hard	N/A
RUSTIC OAK	36-YRO-150	£64.95/m ²	18mm	150 x 300- 1600mm*	1.98m ² Variable no.	Rustic	Oiled	Tongue & Groove	Bevelled	Stuck down or nailed	Not Suitable	Hard	N/A
RUSTIC OAK	36-YOR-150	£64.95/m ²	18mm	150 x 300- 1600mm*	1.98m ² Variable no.	Rustic	Lacquered	Tongue & Groove	Bevelled	Stuck down or nailed	Not Suitable	Hard	N/A
WALNUT	36-YWR-001	£100.95/m ²	18mm	130 x 300- 1500mm*	2.29m ² Variable no.	Rustic	Matt Lacquered	Tongue & Groove	Bevelled	Stuck down or nailed	Not Suitable	Medium	N/A
ANTIQUE	36-YOA-150	£75.95/m ²	18mm	150 x 300- 1600mm*	1.98m ² Variable no.	Rustic	Matt Lacquered	Tongue & Groove	Bevelled	Stuck down or nailed	Not Suitable	Hard	N/A
SALCOMBE													
CHALKED OAK	45-WAW-020	£68.95/m ²	14mm 3mm wear	190 x 1860mm	2.81m ² 8 planks	Rustic	B & M Lacquered	Easiloc	Bevelled	Floated	Suitable	Hard	1.13
SANDY OAK	45-WAP-019	£68.95/m ²	14mm 3mm wear	190 x 1860mm	2.81m ² 8 planks	Rustic	B & M Lacquered	Easiloc	Bevelled	Floated	Suitable	Hard	1.13
SEASHORE OAK	45-WDG-013	£68.95/m ²	14mm 3mm wear	190 x 1860mm	2.81m ² 8 planks	Rustic	B & M Lacquered	Easiloc	Bevelled	Floated	Suitable	Hard	1.13
SUNWASHED OAK	45-WAG-015	£68.95/m ²	14mm 3mm wear	190 x 1860mm	2.81m ² 8 planks	Rustic	B & M Lacquered	Easiloc	Bevelled	Floated	Suitable	Hard	1.13
DUNE OAK	45-WGR-016	£68.95/m ²	14mm 3mm wear	190 x 1860mm	2.81m ² 8 planks	Rustic	B & M Lacquered	Easiloc	Bevelled	Floated	Suitable	Hard	1.13
MOONBEAM OAK	45-WAB-014	£68.95/m ²	14mm 3mm wear	190 x 1860mm	2.81m ² 8 planks	Rustic	B & M Lacquered	Easiloc	Bevelled	Floated	Suitable	Hard	1.13
HARBOUR OAK	45-WAB-018	£68.95/m ²	14mm 3mm wear	190 x 1860mm	2.81m ² 8 planks	Rustic	B & M Lacquered	Easiloc	Bevelled	Floated	Suitable	Hard	1.13
SHADOW OAK	45-WAC-017	£68.95/m ²	14mm 3mm wear	190 x 1860mm	2.81m ² 8 planks	Rustic	B & M Lacquered	Easiloc	Bevelled	Floated	Suitable	Hard	1.13
NATURAL OAK 3-STRIP	46-WOU-003	£48.95/m ²	14mm 3mm wear	182 x 2190mm	3.587m ² 8 planks	Rustic	Lacquered	Easiloc	Bevelled	Floated	Suitable	Hard	1.13
NATURAL OAK	45-WGO-000	£68.95/m ²	14mm 3mm wear	190 x 1860mm	2.81m ² 8 planks	Rustic	B & M Lacquered	Easiloc	Bevelled	Floated	Suitable	Hard	1.13
HARLECH													
WHITE OAK	35-HWO-148	£71.95/m ²	15mm 4mm wear	148 x 1860mm**	1.65m ² 6 planks	Rustic	Oiled	Tongue & Groove	Bevelled	Floated, stuck or nailed	Suitable if stuck down	Hard	1.13
WHITE OAK	35-HWO-189	£74.95/m ²	15mm 4mm wear	189 x 1860mm**	2.1m ² 6 planks	Rustic	Oiled	Tongue & Groove	Bevelled	Floated, stuck or nailed	Suitable if stuck down	Hard	1.13
RAW OAK	35-HRA-001	£74.95/m ²	15mm 4mm wear	189 x 1860mm**	2.1m ² 6 planks	Rustic	B & M Lacquered	Tongue & Groove	Bevelled	Floated, stuck or nailed	Suitable if stuck down	Hard	1.13
RAW OAK	35-HRA-240	£89.95/m ²	15mm 4mm wear	240 x 2200mm**	2.11m ² 4 planks	Rustic	B & M Lacquered	Tongue & Groove	Bevelled	Floated, stuck or nailed	Suitable if stuck down	Hard	1.13
WHITE SMOKED OAK	35-HWS-001	£74.95/m ²	15mm 4mm wear	148 x 1860mm**	1.65m ² 6 planks	Rustic	B & M Lacquered	Tongue & Groove	Bevelled	Floated, stuck or nailed	Suitable if stuck down	Hard	1.13
WHITE SMOKED OAK	35-HWS-240	£89.95/m ²	15mm 4mm wear	240 x 2200mm**	2.11m ² 4 planks	Rustic	B & M Lacquered	Tongue & Groove	Bevelled	Floated, stuck or nailed	Suitable if stuck down	Hard	1.13
SELECT OAK	35-HOO-005	£77.95/m ²	15mm 4mm wear	189 x 1860mm**	2.1m ² 6 planks	Select	Oiled	Tongue & Groove	Bevelled	Floated, stuck or nailed	Suitable if stuck down	Hard	1.13
SELECT OAK	35-HOL-001	£77.95/m ²	15mm 4mm wear	189 x 1860mm**	2.1m ² 6 planks	Select	Matt Lacquered	Tongue & Groove	Bevelled	Floated, stuck or nailed	Suitable if stuck down	Hard	1.13

* 700mm average. ** Packs may include cut lengths.

COLOUR KEY:

 Solid Wood Flooring
  Engineered Wood Flooring
  Bamboo Flooring
  Laminate Flooring

	CODE	PRICE (p.c. m²)	THICKNESS	DIMENSIONS	PACK SIZE	GRADE	FINISH	JOINT TYPE	EDGES	FIXING METHOD	UNDERFLOOR HEATING	HARDNESS	TOG RATING
RUSTIC OAK	35-HOC-148	£62.95/m²	15mm 4mm wear	148 x 1860mm**	1.65m² 6 planks	Rustic	Oiled	Tongue & Groove	Bevelled	Floated, stuck or nailed	Suitable if stuck down	Hard	1.13
RUSTIC OAK	35-HRO-001	£66.95/m²	15mm 4mm wear	189 x 1860mm**	2.1m² 6 planks	Rustic	Oiled	Tongue & Groove	Bevelled	Floated, stuck or nailed	Suitable if stuck down	Hard	1.13
RUSTIC OAK	35-HOB-001	£67.95/m²	15mm 4mm wear	148 x 1860mm**	1.65m² 6 planks	Rustic	B & M Lacquered	Tongue & Groove	Bevelled	Floated, stuck or nailed	Suitable if stuck down	Hard	1.13
RUSTIC OAK	35-HRO-240	£86.95/m²	15mm 4mm wear	240 x 2200mm**	2.11m² 4 planks	Rustic	B & M Lacquered	Tongue & Groove	Bevelled	Floated, stuck or nailed	Suitable if stuck down	Hard	1.13
SMOKED OAK	35-HSO-001	£71.95/m²	15mm 4mm wear	189 x 1860mm**	2.1m² 6 planks	Rustic	Oiled	Tongue & Groove	Bevelled	Floated, stuck or nailed	Suitable if stuck down	Hard	1.13
COGNAC OAK	35-HOC-001	£74.95/m²	15mm 4mm wear	148 x 1860mm**	1.65m² 6 planks	Rustic	B & M Lacquered	Tongue & Groove	Bevelled	Floated, stuck or nailed	Suitable if stuck down	Hard	1.13
WALNUT	35-HWL-001	£98.95/m²	15mm 4mm wear	148 x 1860mm**	1.65m² 6 planks	Rustic	Matt Lacquered	Tongue & Groove	Bevelled	Floated, stuck or nailed	Suitable if stuck down	Medium	1.19
CHOCOLATE OAK	35-HCW-001	£74.95/m²	15mm 4mm wear	189 x 1860mm**	2.1m² 6 planks	Rustic	B & M Lacquered	Tongue & Groove	Bevelled	Floated, stuck or nailed	Suitable if stuck down	Hard	1.13
MISTED OAK	35-HMI-001	£74.95/m²	15mm 4mm wear	189 x 1860mm**	2.1m² 6 planks	Rustic	B & M Lacquered	Tongue & Groove	Bevelled	Floated, stuck or nailed	Suitable if stuck down	Hard	1.13
TWILIGHT OAK	35-HTW-001	£74.95/m²	15mm 4mm wear	189 x 1860mm**	2.1m² 6 planks	Rustic	B & M Lacquered	Tongue & Groove	Bevelled	Floated, stuck or nailed	Suitable if stuck down	Hard	1.13
STORMY OAK	35-HWG-001	£74.95/m²	15mm 4mm wear	189 x 1860mm**	2.1m² 6 planks	Rustic	B & M Lacquered	Tongue & Groove	Bevelled	Floated, stuck or nailed	Suitable if stuck down	Hard	1.13
BERKELEY													
WHITE OAK	38-BWO-005	£87.95/m²	15mm 4mm wear	190 x 1860mm**	2.11m² 6 planks	Extra Rustic	Oiled	Tongue & groove	Bevelled	Floated, stuck or nailed	Suitable if stuck down	Hard	1.13
MONTANA OAK	38-BOM-001	£87.95/m²	15mm 4mm wear	190 x 1860mm**	2.11m² 6 planks	Extra Rustic	Oiled	Tongue & groove	Bevelled	Floated, stuck or nailed	Suitable if stuck down	Hard	1.13
GREY OAK	38-BAG-001	£87.95/m²	15mm 4mm wear	190 x 1860mm**	2.11m² 6 planks	Extra Rustic	Oiled	Tongue & groove	Bevelled	Floated, stuck or nailed	Suitable if stuck down	Hard	1.13
WASHED OAK	38-BOW-002	£87.95/m²	15mm 4mm wear	190 x 1860mm**	2.11m² 6 planks	Extra Rustic	Oiled	Tongue & groove	Bevelled	Floated, stuck or nailed	Suitable if stuck down	Hard	1.13
NATURAL OAK	38-BON-004	£87.95/m²	15mm 4mm wear	190 x 1860mm**	2.11m² 6 planks	Extra Rustic	Oiled	Tongue & groove	Bevelled	Floated, stuck or nailed	Suitable if stuck down	Hard	1.13
COTTAGE OAK	38-BDW-001	£87.95/m²	15mm 4mm wear	190 x 1860mm**	2.11m² 6 planks	Extra Rustic	Oiled	Tongue & groove	Bevelled	Floated, stuck or nailed	Suitable if stuck down	Hard	1.13
SMOKED OAK	38-BOS-003	£87.95/m²	15mm 4mm wear	190 x 1860mm**	2.11m² 6 planks	Extra Rustic	Oiled	Tongue & groove	Bevelled	Floated, stuck or nailed	Suitable if stuck down	Hard	1.13
BURNT OAK	38-BOA-006	£87.95/m²	15mm 4mm wear	190 x 1860mm**	2.11m² 6 planks	Extra Rustic	Oiled	Tongue & groove	Bevelled	Floated, stuck or nailed	Suitable if stuck down	Hard	1.13
RUGGED OAK	38-BRO-001	£87.95/m²	15mm 4mm wear	190 x 1860mm**	2.11m² 6 planks	Extra Rustic	Oiled	Tongue & groove	Bevelled	Floated, stuck or nailed	Suitable if stuck down	Hard	1.13
CELLAR OAK	38-BCO-001	£87.95/m²	15mm 4mm wear	190 x 1860mm**	2.11m² 6 planks	Extra Rustic	Oiled	Tongue & groove	Bevelled	Floated, stuck or nailed	Suitable if stuck down	Hard	1.13
GOODRICH													
COTTON OAK	32-GCT-001	£83.95/m²	15mm 4mm wear	90 x 400mm	1.296m² 36 planks	Rustic	B & M Lacquered	Tongue & groove	Bevelled	Floated, stuck or nailed	Suitable if stuck down	Hard	1.13
WHITENED OAK	32-GWH-001	£83.95/m²	15mm 4mm wear	90 x 400mm	1.296m² 36 planks	Rustic	B & M Lacquered	Tongue & groove	Bevelled	Floated, stuck or nailed	Suitable if stuck down	Hard	1.13
HAZE OAK	32-CGR-001	£105.95/m²	15mm 4mm wear	90 x 400mm	1.296m² 36 planks	Rustic	B & M Lacquered	Tongue & groove	Bevelled	Floated, stuck or nailed	Suitable if stuck down	Hard	1.13
FEATHER OAK	32-OGW-001	£83.95/m²	15mm 4mm wear	90 x 400mm	1.296m² 36 planks	Rustic	B & M Lacquered	Tongue & groove	Bevelled	Floated, stuck or nailed	Suitable if stuck down	Hard	1.13

** Packs may include cut lengths.

	CODE	PRICE (p/c - var)	THICKNESS	DIMENSIONS	PACK SIZE	GRADE	FINISH	JOINT TYPE	EDGES	FIXING METHOD	UNDERFLOOR HEATING	HARDNESS	TOG RATING
SALTED OAK	32-SGR-001	£83.95/m²	15mm 4mm wear	90 x 400mm	1.296m² 36 planks	Rustic	B & M Lacquered	Tongue & groove	Bevelled	Floated, stuck or nailed	Suitable if stuck down	Hard	1.13
ECRU OAK	32-GEO-001	£83.95/m²	15mm 4mm wear	90 x 400mm	1.296m² 36 planks	Rustic	B & M Lacquered	Tongue & groove	Bevelled	Floated, stuck or nailed	Suitable if stuck down	Hard	1.13
ASH OAK	32-GAS-001	£83.95/m²	15mm 4mm wear	90 x 400mm	1.296m² 36 planks	Rustic	B & M Lacquered	Tongue & groove	Bevelled	Floated, stuck or nailed	Suitable if stuck down	Hard	1.13
NATURAL OAK	32-GNA-001	£83.95/m²	15mm 4mm wear	90 x 400mm	1.296m² 36 planks	Rustic	B & M Lacquered	Tongue & groove	Bevelled	Floated, stuck or nailed	Suitable if stuck down	Hard	1.13
COFFEE OAK	32-GCO-001	£83.95/m²	15mm 4mm wear	90 x 400mm	1.296m² 36 planks	Rustic	B & M Lacquered	Tongue & groove	Bevelled	Floated, stuck or nailed	Suitable if stuck down	Hard	1.13
TRUFFLE OAK	32-GSC-001	£83.95/m²	15mm 4mm wear	90 x 400mm	1.296m² 36 planks	Rustic	B & M Lacquered	Tongue & groove	Bevelled	Floated, stuck or nailed	Suitable if stuck down	Hard	1.13
ESPRESSO OAK	32-GCW-001	£83.95/m²	15mm 4mm wear	90 x 400mm	1.296m² 36 planks	Rustic	B & M Lacquered	Tongue & groove	Bevelled	Floated, stuck or nailed	Suitable if stuck down	Hard	1.13

Some Goodrich laying patterns require additional grooves to be inserted.

CHEPSTOW													
WHITENED OAK	65-POW-001	£97.95/m²	21mm 6mm wear	189 x 1860mm**	2.11m² 6 planks	Rustic	Hardwax Oiled	Tongue & groove	Bevelled	Floated, stuck or nailed	Suitable if stuck down	Hard	1.2
VANILLA OAK	65-PVA-001	£97.95/m²	21mm 6mm wear	189 x 1860mm**	2.11m² 6 planks	Rustic	Hardwax Oiled	Tongue & groove	Bevelled	Floated, stuck or nailed	Suitable if stuck down	Hard	1.2
PLANED GREY OAK	65-POG-001	£97.95/m²	21mm 6mm wear	189 x 1860mm**	2.11m² 6 planks	Rustic	Hardwax Oiled	Tongue & groove	Bevelled	Floated, stuck or nailed	Suitable if stuck down	Hard	1.2
SAWN GREY OAK	65-SOG-001	£125.95/m²	21mm 6mm wear	189 x 1860mm**	2.11m² 6 planks	Rustic	Hardwax Oiled	Tongue & groove	Bevelled	Floated, stuck or nailed	Suitable if stuck down	Hard	1.2
WASHED OAK	65-RWA-001	£97.95/m²	21mm 6mm wear	190 x 1900mm**	1.444m² 4 planks	Rustic	Hardwax Oiled	Tongue & groove	2 Bevelled	Floated, stuck or nailed	Suitable if stuck down	Hard	1.2
CALICO OAK	65-PCA-001	£115.95/m²	21mm 6mm wear	189 x 1860mm**	2.11m² 6 planks	Rustic	Hardwax Oiled	Tongue & groove	Bevelled	Floated, stuck or nailed	Suitable if stuck down	Hard	1.2
RUSTIC OAK	65-HMU-001	£83.95/m²	21mm 6mm wear	189 x 1860mm**	2.11m² 6 planks	Rustic	Unfinished	Tongue & groove	Bevelled	Floated, stuck or nailed	Suitable if stuck down	Hard	1.2
RUSTIC OAK	65-HBO-001	£89.95/m²	21mm 6mm wear	189 x 1860mm**	2.11m² 6 planks	Rustic	Brushed & Oiled	Tongue & groove	Bevelled	Floated, stuck or nailed	Suitable if stuck down	Hard	1.2
RUSTIC OAK	65-HML-001	£89.95/m²	21mm 6mm wear	189 x 1860mm**	2.11m² 6 planks	Rustic	Matt Lacquered	Tongue & groove	Bevelled	Floated, stuck or nailed	Suitable if stuck down	Hard	1.2
RUSTIC OAK	65-HBO-002	£104.95/m²	21mm 6mm wear	240 x 2200mm**	2.11m² 4 planks	Rustic	Brushed & Oiled	Tongue & groove	Bevelled	Floated, stuck or nailed	Suitable if stuck down	Hard	1.2
NATURAL OAK	65-AON-001	£115.95/m²	21mm 6mm wear	190 x 1900mm**	1.444m² 4 planks	Rustic	Hardwax Oiled	Tongue & groove	2 Bevelled	Floated, stuck or nailed	Suitable if stuck down	Hard	1.2
ANTIQUE OAK	65-POA-001	£97.95/m²	21mm 6mm wear	189 x 1860mm**	2.11m² 6 planks	Rustic	Hardwax Oiled	Tongue & groove	Bevelled	Floated, stuck or nailed	Suitable if stuck down	Hard	1.2
CHARCOAL OAK	65-AOC-001	£115.95/m²	21mm 6mm wear	190 x 1900mm**	1.444m² 4 planks	Rustic	Hardwax Oiled	Tongue & groove	2 Bevelled	Floated, stuck or nailed	Suitable if stuck down	Hard	1.2
COCOA OAK	65-POC-001	£97.95/m²	21mm 6mm wear	189 x 1860mm**	2.11m² 6 planks	Rustic	Hardwax Oiled	Tongue & groove	Bevelled	Floated, stuck or nailed	Suitable if stuck down	Hard	1.2
BRONZED OAK	65-SOB-001	£125.95/m²	21mm 6mm wear	189 x 1860mm**	2.11m² 6 planks	Rustic	Hardwax Oiled	Tongue & groove	Bevelled	Floated, stuck or nailed	Suitable if stuck down	Hard	1.2
OXWICH													
NATURAL	20-SWN-001	£69.95/m²	12mm	135 x 1850mm	1.498m² 6 planks	-	Matt Lacquered	Easiloc	Bevelled	Floated	Suitable	Very hard	1.1
COFFEE	20-SWC-001	£69.95/m²	12mm	135 x 1850mm	1.498m² 6 planks	-	Matt Lacquered	Easiloc	Bevelled	Floated	Suitable	Very hard	1.1
WHITEWASH	20-SWH-001	£73.95/m²	12mm	135 x 1850mm	1.498m² 6 planks	-	Lacquered	Easiloc	Bevelled	Floated	Suitable	Very hard	1.1
SADDLE	20-SSA-001	£73.95/m²	12mm	135 x 1850mm	1.498m² 6 planks	-	Lacquered	Easiloc	Bevelled	Floated	Suitable	Very hard	1.1

** Packs may include cut lengths.

WEMBURY	CODE	PRICE (INC. VAT)	THICKNESS	DIMENSIONS	PACK SIZE	JOINT TYPE	EDGES	FIXING METHOD	UNDERFLOOR HEATING	HARDNESS	TOG RATING
LINEN OAK	28-OSI-238	£24.95/m ²	8mm	193 x 1291mm	1.99m ² 8 planks	Easiloc	Bevelled	Floated	Suitable	Hard	0.7
COCONUT OAK	28-OSI-262	£24.95/m ²	8mm	193 x 1291mm	1.99m ² 8 planks	Easiloc	Bevelled	Floated	Suitable	Hard	0.7
POLAR PINE	28-OSI-271	£24.95/m ²	8mm	193 x 1291mm	1.99m ² 8 planks	Easiloc	Bevelled	Floated	Suitable	Hard	0.7
FROSTED OAK	28-OSI-270	£24.95/m ²	8mm	193 x 1291mm	1.99m ² 8 planks	Easiloc	Bevelled	Floated	Suitable	Hard	0.7
WINTER OAK	28-OSI-211	£24.95/m ²	8mm	327 x 1291mm	2.53m ² 6 planks	Easiloc	Bevelled	Floated	Suitable	Hard	0.7
COASTAL OAK	28-OSI-241	£24.95/m ²	8mm	193 x 1291mm	1.99m ² 8 planks	Easiloc	Bevelled	Floated	Suitable	Hard	0.7
BISCUIT OAK	28-OSI-263	£24.95/m ²	8mm	193 x 1291mm	1.99m ² 8 planks	Easiloc	Bevelled	Floated	Suitable	Hard	0.7
NORDIC OAK	28-OSI-261	£24.95/m ²	8mm	193 x 1291mm	1.99m ² 8 planks	Easiloc	Bevelled	Floated	Suitable	Hard	0.7
WILD OAK	28-OSI-264	£24.95/m ²	8mm	193 x 1291mm	1.99m ² 8 planks	Easiloc	Bevelled	Floated	Suitable	Hard	0.7
DRIFTWOOD	28-OSI-259	£24.95/m ²	8mm	193 x 1291mm	1.99m ² 8 planks	Easiloc	Bevelled	Floated	Suitable	Hard	0.7
HARVEST OAK	28-OSI-275	£24.95/m ²	8mm	193 x 1291mm	1.99m ² 8 planks	Easiloc	Bevelled	Floated	Suitable	Hard	0.7
DESERT PINE	28-OSI-272	£24.95/m ²	8mm	193 x 1291mm	1.99m ² 8 planks	Easiloc	Bevelled	Floated	Suitable	Hard	0.7
NATURAL OAK	28-OSI-244	£24.95/m ²	8mm	193 x 1291mm	1.99m ² 8 planks	Easiloc	Bevelled	Floated	Suitable	Hard	0.7
SPRING OAK	28-OSI-210	£24.95/m ²	8mm	327 x 1291mm	2.53m ² 6 planks	Easiloc	Bevelled	Floated	Suitable	Hard	0.7
HONEY OAK	28-OSI-273	£24.95/m ²	8mm	246 x 1291mm	2.54m ² 8 planks	Easiloc	Bevelled	Floated	Suitable	Hard	0.7
COTSWOLD OAK	28-OSI-246	£24.95/m ²	8mm	193 x 1291mm	1.99m ² 8 planks	Easiloc	Bevelled	Floated	Suitable	Hard	0.7
DUSKY OAK	28-OSI-274	£24.95/m ²	8mm	246 x 1291mm	2.54m ² 8 planks	Easiloc	Bevelled	Floated	Suitable	Hard	0.7
AUTUMN OAK	28-OSI-212	£24.95/m ²	8mm	327 x 1291mm	2.53m ² 6 planks	Easiloc	Bevelled	Floated	Suitable	Hard	0.7
BRECON											
IVORY OAK	29-BRE-007	£39.95/m ²	5mm	180 x 1220mm	2.2m ² 10 planks	Easiloc	Square	Floated	Suitable	Hard	N/A
RUSSET OAK	29-BRE-013	£39.95/m ²	5mm	180 x 1220mm	2.2m ² 10 planks	Easiloc	Square	Floated	Suitable	Hard	N/A
DOVE OAK	29-BRE-005	£39.95/m ²	5mm	180 x 1220mm	2.2m ² 10 planks	Easiloc	Square	Floated	Suitable	Hard	N/A
SEASHELL OAK	29-BRE-009	£39.95/m ²	5mm	180 x 1220mm	2.2m ² 10 planks	Easiloc	Square	Floated	Suitable	Hard	N/A
WAREHOUSE OAK	29-BRE-012	£39.95/m ²	5mm	180 x 1220mm	2.2m ² 10 planks	Easiloc	Square	Floated	Suitable	Hard	N/A
WHISPER OAK	29-BRE-011	£39.95/m ²	5mm	180 x 1220mm	2.2m ² 10 planks	Easiloc	Square	Floated	Suitable	Hard	N/A
RIVER OAK	29-BRE-002	£39.95/m ²	5mm	180 x 1220mm	2.2m ² 10 planks	Easiloc	Square	Floated	Suitable	Hard	N/A
BARLEY OAK	29-BRE-006	£39.95/m ²	5mm	180 x 1220mm	2.2m ² 10 planks	Easiloc	Square	Floated	Suitable	Hard	N/A
FARM OAK	29-BRE-003	£39.95/m ²	5mm	180 x 1220mm	2.2m ² 10 planks	Easiloc	Square	Floated	Suitable	Hard	N/A
FAWN OAK	29-BRE-008	£39.95/m ²	5mm	180 x 1220mm	2.2m ² 10 planks	Easiloc	Square	Floated	Suitable	Hard	N/A
TOASTED OAK	29-BRE-004	£39.95/m ²	5mm	180 x 1220mm	2.2m ² 10 planks	Easiloc	Square	Floated	Suitable	Hard	N/A
MONO OAK	29-BRE-001	£39.95/m ²	5mm	180 x 1220mm	2.2m ² 10 planks	Easiloc	Square	Floated	Suitable	Hard	N/A

ACCESSORIES

Faithful tools and finishing touches

When you step onto a Woodpecker floor, you'll sense the natural environment underfoot and all around you. To ensure every fit evokes such a lovely aura, our experts have developed a huge range of supporting accessories. From subfloor preparation to underlays, and adhesives to trims, our products will ensure that a Woodpecker floor looks and feels just perfect.

Our range of underlays and barriers provide support, comfort and enduring protection with products to suit simple and tricky installations. We know how important a great underlay is to achieving a floor that functions naturally well in the home, and all of our underlays have been designed to meet and exceed industry standards.

Sometimes a smooth surface is difficult to achieve but to help get the most impressive result, Woodpecker has created a range of subfloor treatments. And to ensure stick-down installations are sturdy, Woodpecker's adhesive has been specially made to allow for the natural movements in timber between seasons while remaining fully bonded to the floor.

When it comes to the finishing touches for where flooring meets skirting boards, heating pipes and the edges of stairs, choosing the right bits can seem complicated. Thankfully, with Woodpecker's range of trims, it becomes an easy process. Every floor in our extensive catalogue has a trim code matching it to products that suit its colour and thickness. And our strict shade-matching process ensures that we select the closest complements for the most consistent finish.

NATURALLY INSPIRED WALLS

CREATE A FANTASTIC FEATURE





Bring nature home and create a stunning feature with Woodpecker on your walls. Any of the floors in our Harlech, Berkeley or Chepstow collections can be clad onto the wall using our handy clips, without the need for glue or any tricky tools.

Choose to suit your flooring, add a contrasting colour or mix boards. Be inspired to capture something a little different in your space.

Product	Product code	Qty	RRP (inc. VAT)
Wall Clips	01-SPR-001	30	£59.00

PROFILES

FOR A SMOOTH AND NATURAL TRANSITION

Our profiles will give your nature inspired flooring a clean and attractive finish. They are designed to conceal expansion gaps or to provide a tidy transition between different floor surfaces which, left as they are, can look unsightly. We offer seven different kinds of profiles, designed to complement every type of flooring in our catalogue. They'll be an essential part of your delightful new décor.

TWIN PROFILE

Also called a 'T-bar' or 'expansion', the twin profile is used to cover the expansion gap between two floors of equal height, providing a neat finish at a doorway, or serving as a room divider.



RAMP PROFILE

Where one surface meets another at uneven heights, a ramp profile is used. Typically, they bridge the gap between vinyl and wooden flooring. They are also called 'reducers' or 'adapters'.



SEMI RAMP PROFILE

Where two surfaces meet but the difference in height is slight, a semi-ramp profile is the solution. They are ideal where your wood floor transitions to carpet.



END PROFILE

This profile is commonly used for inset mat wells, as well as where wooden flooring meets a patio door. They're also called 'edge', 'square edge' or 'end stop' profiles.



STAIR NOSING PROFILE

Protect the edges of the flooring on your staircase with a stair nosing profile. This trim will stop excessive wear and tear and looks smart. It comes in colours to complement our flooring.



SCOTIA PROFILE

It's not always possible to remove and refit skirting boards when you fit a wooden floor, so this inwardly curved trim can be used to hide the expansion gap between skirting and the flooring.



QUADRANT PROFILE

Whereas the scotia profile curves inwards, the quadrant curves outwards for a more distinctive impression. Again, it hides the expansion gap between floor and skirting board.



COLOUR MATCHING

We have very careful selection processes in place to ensure that all our wood trims fully complement our floorboard range. However, do be aware that like the flooring, profiles are subject to natural colour variation and may not appear to match the flooring exactly.



PROFILO PROFILES

If you're fitting a hardwood floor, solid oak profiles provide the perfect finishing touch. Carefully pre-finished with several coats of lacquer, they are durable and sturdy, and are fixed directly to your subfloor.

Our Profilo trims come in a range of colours to complement your choice of flooring, and in various lengths and heights. They're great on a budget, especially if you're bridging multiple rooms and materials. But the best thing about them is that they offer truly natural transitions.

CONTOUR PROFILES

Woodpecker's Contour profiles are made from solid wood for the most natural of finishes. Unlike the Profilo range, these ones slip into a black channel, which is glued or screwed to the subfloor. We've designed Contour profiles to work with each floor in our range, so you'll be able to find the trim you need in the height and colour that's right for your floor. Convenient and elegant, they'll neatly cover transitions, expansion gaps and edges.


PROFILE TRIM FINISHES

FLOOR NAME	NATURAL	STAINED	WALNUT	FLOOR NAME	NATURAL	STAINED	WALNUT	FLOOR NAME	NATURAL	STAINED	WALNUT
York White Washed Oak			✓	Harlech Rustic Oak		✓		Goodrich Salted Oak		✓	
York Grey Washed Oak			✓	Harlech Smoked Oak		✓		Goodrich Ecru Oak		✓	
York Select Oak	✓			Harlech Cognac Oak		✓		Goodrich Ash Oak		✓	
York Rustic Oak	✓			Harlech Walnut			✓	Goodrich Natural Oak	✓		
York Walnut			✓	Harlech Stormy Oak		✓		Goodrich Coffee Oak		✓	
York Antique Oak		✓		Harlech Chocolate Oak		✓		Goodrich Truffle Oak		✓	
Salcombe Chalked Oak		✓		Harlech Twilight Oak		✓		Goodrich Espresso Oak		✓	
Salcombe Sandy Oak		✓		Berkeley White Oak		✓		Chepstow Whitened Oak		✓	
Salcombe Seashore Oak		✓		Berkeley Montana Oak		✓		Chepstow Vanilla Oak		✓	
Salcombe Sunwashed Oak	✓			Berkeley Grey Oak		✓		Chepstow Grey Oak		✓	
Salcombe Dune Oak		✓		Berkeley Washed Oak		✓		Chepstow Sawn Grey Oak		✓	
Salcombe Moonbeam Oak		✓		Berkeley Natural Oak		✓		Chepstow Washed Oak		✓	
Salcombe Harbour Oak		✓		Berkeley Cottage Oak		✓		Chepstow Calico Oak		✓	
Salcombe Shadow Oak		✓		Berkeley Smoked Oak		✓		Chepstow Rustic Oak	✓		
Salcombe Natural Oak 3-Strip	✓			Berkeley Burnt Oak		✓		Chepstow Natural Oak	✓		
Salcombe Natural Oak	✓			Berkeley Rugged Oak		✓		Chepstow Antique Oak		✓	
Harlech White Oiled Oak		✓		Berkeley Cellar Oak		✓		Chepstow Charcoal Oak		✓	
Harlech Misted Oak		✓		Goodrich Cotton Oak		✓		Chepstow Cocoa Oak		✓	
Harlech Raw Oak		✓		Goodrich Whitened Oak		✓		Chepstow Bronzed Oak		✓	
Harlech White Smoked Oak		✓		Goodrich Haze Oak		✓					
Harlech Select Oak	✓			Goodrich Feather		✓					


PROFILO™

SOLID OAK PROFILES

TWIN PROFILE




MEDIUM - FOR FLOORS 15MM IN DEPTH




Floor	Length (m)	RRP (inc VAT)
Natural Oak or Unfinished	0.90	£18.00
	2.70	£45.50
Stained	0.90	£24.50
	2.70	£67.00

HIGH - FOR FLOORS 20MM IN DEPTH




Floor	Length (m)	RRP (inc VAT)
Natural Oak or Unfinished	0.90	£20.00
	2.70	£53.00
Stained	0.90	£24.50
	2.70	£67.00

RAMP PROFILE




MEDIUM - FOR FLOORS 15MM IN DEPTH



Floor	Length (m)	RRP (inc VAT)
Natural Oak or Unfinished	0.90	£18.00
	2.70	£45.50
Stained	0.90	£24.50
	2.70	£67.00

HIGH - FOR FLOORS 20MM IN DEPTH



Floor	Length (m)	RRP (inc VAT)
Natural Oak or Unfinished	0.90	£20.00
	2.70	£53.00
Stained	0.90	£24.50
	2.70	£67.00

HOW TO
ORDER

WHEN PLACING YOUR PHONE, EMAIL OR FAX ORDER, PLEASE QUOTE:


1) **Full Name of Floor** 2) **Range:** Profilo or Contour 3) **Type:** Twin, Ramp, Semi-ramp, End, Stair Nosing, T&G Stair Nosing, Scotia 4) **Length**
E.g. Goodrich Coffee Oak, Profilo, Twin, 0.90m

Not sure if your floor is natural oak or stained? See p. 117.

SEMI-RAMP PROFILE




MEDIUM - FOR FLOORS 15MM IN DEPTH

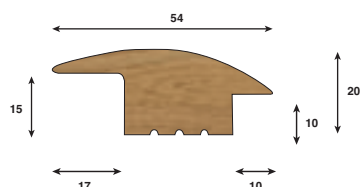

Floor	Length (m)	RRP (inc VAT)
Natural Oak or Unfinished	0.90	£18.00
	2.70	£45.50
Stained	0.90	£24.50
	2.70	£67.00

HIGH - FOR FLOORS 20MM IN DEPTH

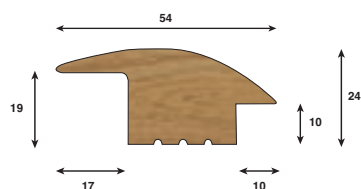


Floor	Length (m)	RRP (inc VAT)
Natural Oak or Unfinished	0.90	£20.00
	2.70	£53.00
Stained	0.90	£24.50
	2.70	£67.00

END PROFILE




MEDIUM - FOR FLOORS 15MM IN DEPTH



Floor	Length (m)	RRP (inc VAT)
Natural Oak or Unfinished	0.90	£18.00
	2.70	£45.50
Stained	0.90	£22.50
	2.70	£58.50

HIGH - FOR FLOORS 20MM IN DEPTH



Floor	Length (m)	RRP (inc VAT)
Natural Oak or Unfinished	0.90	£20.00
	2.70	£53.00
Stained	0.90	£24.50
	2.70	£67.00

EXPERT TIP

FOR A NATURAL FINISH

When you buy your profiles, you'll choose colours with the closest match to your floor. Go one step further when fitting and select the boards nearest in colour to your trim to go around the perimeters and in doorways to ensure the most natural-looking finish.

CONTOUR™

SOLID WOOD PROFILES

TWIN PROFILE

MEDIUM - FOR FLOORS 15-18MM IN DEPTH

Floor	Length (m)	RRP (inc VAT)
Natural Oak or Unfinished	0.99	£24.50
	2.70	£65.50
Stained	0.99	£27.50
	2.70	£74.00
Walnut	0.99	£34.00
	2.70	£102.00

HIGH - FOR FLOORS 18-22MM IN DEPTH

Floor	Length (m)	RRP (inc VAT)
Natural Oak or Unfinished	0.99	£26.50
	2.70	£71.00
Stained	0.99	£30.50
	2.70	£82.50

RAMP PROFILE

MEDIUM - FOR FLOORS 15-18MM IN DEPTH

Floor	Length (m)	RRP (inc VAT)
Natural Oak or Unfinished	0.99	£30.50
	2.70	£81.50
Stained	0.99	£33.00
	2.70	£88.00
Walnut	0.99	£46.50
	2.70	£135.50

HIGH - FOR FLOORS 18-22MM IN DEPTH

Floor	Length (m)	RRP (inc VAT)
Natural Oak or Unfinished	0.99	£33.00
	2.70	£89.00
Stained	0.99	£38.00
	2.70	£103.00

HOW TO ORDER

WHEN PLACING YOUR PHONE, EMAIL OR FAX ORDER, PLEASE QUOTE:

1) **Full Name of Floor** 2) **Range:** Profilo or Contour 3) **Type:** Twin, Ramp, Semi-ramp, End, Stair Nosing, T&G Stair Nosing, Scotia 4) **Length**


E.g. Goodrich Coffee Oak, Profilo, Twin, 0.90m

Not sure if your floor is natural oak or stained? See p. 117.

SEMI-RAMP PROFILE




MEDIUM - FOR FLOORS 15-18MM IN DEPTH



Floor	Length (m)	RRP (inc VAT)
Natural Oak or Unfinished	0.99	£30.50
	2.70	£81.50
Stained	0.99	£33.00
	2.70	£88.00
Walnut	0.99	£46.50
	2.70	£135.50

HIGH - FOR FLOORS 18-22MM IN DEPTH




Floor	Length (m)	RRP (inc VAT)
Natural Oak or Unfinished	0.99	£33.00
	2.70	£89.00
Stained	0.99	£38.00
	2.70	£103.00

END PROFILE




MEDIUM - FOR FLOORS 15-18MM IN DEPTH




Floor	Length (m)	RRP (inc VAT)
Natural Oak or Unfinished	0.99	£24.50
	2.70	£65.50
Stained	0.99	£27.50
	2.70	£74.00
Walnut	0.99	£34.00
	2.70	£93.50

HIGH - FOR FLOORS 18-22MM IN DEPTH





Floor	Length (m)	RRP (inc VAT)
Natural Oak or Unfinished	0.99	£26.50
	2.70	£71.00
Stained	0.99	£30.50
	2.70	£82.50




CONTOUR™

SOLID WOOD PROFILES

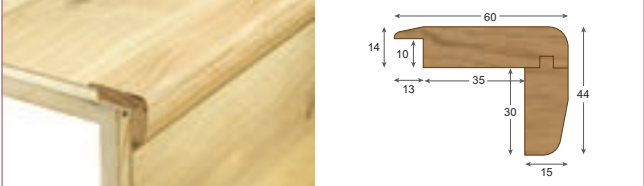STAIR NOSING PROFILE		
		
Floor	Length (m)	RRP (inc VAT)
Natural Oak or Unfinished	1.00	£41.50
	2.70	£109.00
Stained	1.00	£46.50
	2.70	£127.00
Walnut	1.00	£60.50
	2.70	£174.00

SCOTIA PROFILE		
		
Floor	Length (m)	RRP (inc VAT)
Natural Oak or Unfinished	2.70	£23.50
Stained	2.70	£25.50
Walnut	2.70	£39.00

TONGUE & GROOVE STAIR NOSING		
		
FOR FLOORS 15MM IN DEPTH		
Floor	Length (m)	RRP (inc VAT)
Natural Oak or Unfinished	1.00	£41.50
	2.70	£109.00
Stained	1.00	£46.50
	2.70	£127.00
Walnut	1.00	£60.50
	2.70	£174.00
FOR FLOORS 18MM IN DEPTH		
Floor	Length (m)	RRP (inc VAT)
Natural Oak or Unfinished	1.00	£41.50
	2.70	£109.00
Stained	1.00	£46.50
	2.70	£127.00
Walnut	1.00	£60.50
	2.70	£174.00
FOR FLOORS 21MM IN DEPTH		
Floor	Length (m)	RRP (inc VAT)
Natural Oak or Unfinished	1.00	£41.50
	2.70	£109.00
Stained	1.00	£46.50
	2.70	£127.00
Walnut	1.00	£60.50
	2.70	£174.00

HOW TO ORDER

WHEN PLACING YOUR PHONE, EMAIL OR FAX ORDER, PLEASE QUOTE:

1) **Full Name of Floor** 2) **Range:** Profilo or Contour 3) **Type:** Twin, Ramp, Semi-ramp, End, Stair Nosing, T&G Stair Nosing, Scotia 4) **Length**

E.g. Goodrich Coffee Oak, Profilo, Twin, 0.90m

Not sure if your floor is natural oak or stained? See p. 117.

STAIRPRO

A NEAT AND TIDY FINISH

Fitting wood flooring on stairs is even easier with our Stairpro product. Available for Harlech, Berkeley, Salcombe and Chepstow floors, this nifty solution is a neater alternative to stair nosing, and gives a modern, clean finish.

Stairpro can be glued directly to concrete, timber or plywood using our MS Parquet adhesive. Each set comes with a tread and riser pre-mitred with a unique locking system for quick and simple site assembly. Cut to fit the stair width and add extra flooring pieces to make up the stair height and depth for a perfectly transformed staircase.

Length	RRP (inc. VAT)
900mm	£80.00
1800mm	£150.00


HOW TO ORDER:


Quote the name of floor and length required.





OXWICH


BAMBOO PROFILES

STRAND END PROFILE			
			
Colour	Length (m)	Product Code	RRP (inc VAT)
Coffee	1.80	20-EGC-001	£25.00
Natural	1.80	20-EGN-001	£25.00
Saddle	1.80	20-EGS-001	£25.00
White	1.80	20-EGW-001	£25.00

STRAND QUADRANT PROFILE			
			
Colour	Length (m)	Product Code	RRP (inc VAT)
Coffee	1.80	20-QUC-001	£13.50
Natural	1.80	20-QUN-001	£13.50
Saddle	1.80	20-QUS-001	£13.50
White	1.80	20-QUW-001	£13.50

STRAND TWIN PROFILE			
			
Colour	Length (m)	Product Code	RRP (inc VAT)
Coffee	1.80	20-EXC-001	£25.00
Natural	1.80	20-EXN-001	£25.00
Saddle	1.80	20-EXS-001	£25.00
White	1.80	20-EXW-001	£25.00


STRAND STAIR PROFILE			
			
Colour	Length (m)	Product Code	RRP (inc VAT)
Coffee	1.80	20-STC-001	£35.00
Natural	1.80	20-STN-001	£35.00
Saddle	1.80	20-STS-001	£35.00
White	1.80	20-STW-001	£35.00

STRAND RAMP PROFILE			
			
Colour	Length (m)	Product Code	RRP (inc VAT)
Coffee	1.80	20-RAC-001	£25.00
Natural	1.80	20-RAN-001	£25.00
Saddle	1.80	20-RAS-001	£25.00
White	1.80	20-RAW-001	£25.00

METAL


PROFILES

TWIN PROFILE

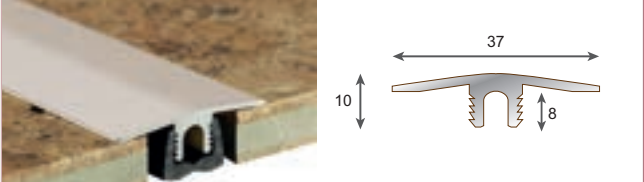


Colour	Length (m)	Product Code	RRP (inc VAT)
Silver	0.99	II-BTS-990	£15.00
	3.00	II-BTS-300	£41.50

RAMP PROFILE

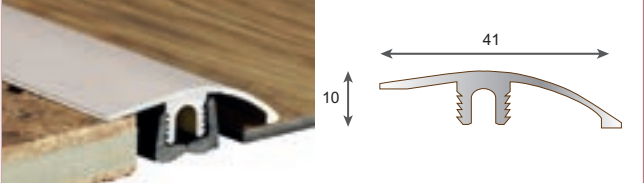

Colour	Length (m)	Product Code	RRP (inc VAT)
Silver	0.99	II-BRS-990	£15.00
	3.00	II-BRS-300	£41.50

END PROFILE




Colour	Length (m)	Product Code	RRP (inc VAT)
Silver	0.99	II-BES-990	£15.00
	3.00	II-BES-300	£41.50

LAMINATE

WOOD EFFECT PROFILES


For every colour of wood in Woodpecker's distinctive Wembury range of laminate flooring there's a trim to suit. Scotia is available to suit all colours in the Brecon range too. The profiles you see here are all designed to complement the wood pattern prints used, and to be as durable as the flooring itself. You'll find your perfect profile below...

TWIN PROFILE




Length (m)	RRP (inc VAT)
2.70	£30.00

RAMP PROFILE




Length (m)	RRP (inc VAT)
2.70	£30.00

END PROFILE




Length (m)	RRP (inc VAT)
2.70	£30.00

STAIR NOSING PROFILE



Length (m)	RRP (inc VAT)
2.70	£36.00

SCOTIA PROFILE



Length (m)	RRP (inc VAT)
2.40	£6.00

HOW TO ORDER

WHEN PLACING YOUR PHONE, EMAIL OR FAX ORDER, PLEASE QUOTE:

- 1) **Full name of floor**
 - 2) **Type:** Twin, Ramp, End, Stair Nosing, Scotia
- E.g. Wembury Coconut Oak Twin

FINISHING TOUCHES

SKIRTING BOARDS AND PIPE COVERS TO SUIT YOUR FLOORING

SKIRTING BOARDS

Create a smooth transition from floor to wall, and hide expansion gaps, with attractive Woodpecker skirting boards



SOLID OAK

Made from rustic grade timber, and available either lacquered or unfinished, our solid oak skirting looks fantastic. Both Torus (beading along the top) and Ogee (with a groove and a bead) profiles are available.

Finished size: 20 x 145 x 2350mm.

Code	RRP (inc. VAT)
69-SKU-145 - Unfinished	£55.00
69-SKO-145 - Lacquered	£68.00



OAK VENEER

With a modern pencil round profile, Woodpecker real oak veneered skirting will give the room a classy finish and has a rear rebate to hide wiring. Skirting clips are available for a glueless installation.

Finished size: 16 x 95 x 2500mm.

Code	RRP (inc. VAT)
11-VOS-095 - Skirting	£44.00
11-SKC-050 - Skirting Clips (Pack of 50)	£27.50



COLOURSEALANT MASTIC

310ml gunnable cartridge for Laminate floors.

Code	Colour	RRP (inc. VAT)
06-WCS-001	Colour Sealant Oak	£6.50
06-WCS-002	Colour Sealant Pine	£6.50
06-WCS-003	Colour Sealant Walnut	£6.50

PIPE COVERS

Conceal that unsightly hole around the radiator pipe with an easy-to-fit cover, colour-matched to your natural wood flooring



SOLID

Our hardwood pipe covers come in two halves with a unique jigsaw design so that they clip together creating a seamless join with an inside diameter of 15mm. These are available to complement all floors in our catalogue.

Colour Code	Per Pack	RRP (inc. VAT)
Oak, Unfinished or Walnut	2	£9.50
Stained	2	£12.00



PLASTIC


Because plastic is so malleable, these matt pipe covers slide easily around the radiator pipe then snap closed to cover the gap between floor and pipe. Six colours are available, they have an inside diameter of 15mm, and they are sold in packs of four.

Code	Colour	Per Pack	RRP (inc. VAT)
06-PPO-150	Oak	4	£5.00
06-PPB-150	Beech	4	£5.00
06-PPC-150	Cherry	4	£5.00
06-PPM-150	Maple	4	£5.00

Code	Colour	Per Pack	RRP (inc. VAT)
06-PPR-150	Merbau	4	£5.00
06-PPV-150	White	4	£5.00

UNDERLAY & BARRIERS

CUSHION & PROTECT YOUR FLOOR

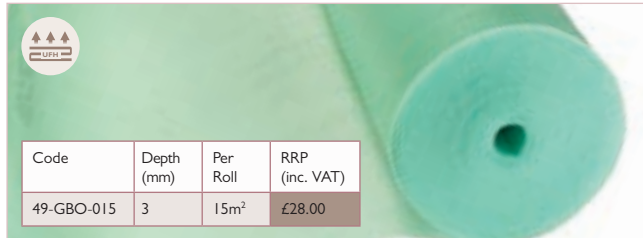

BASIC 20

Where you have a level and moisture-free subfloor, Basic 20 underlay is the optimum choice. It's inexpensive, offers good comfort and support, and has reasonable soundproofing and thermal qualities too. It's particularly useful for upper floors where moisture isn't an issue. Tog rating: 0.84.



AQUASTOP DAMP PROOF MEMBRANE

Designed especially for ground level subfloors where moisture could be present, Aquastop has the same qualities as Basic 20 underlay, plus a laminated damp proof membrane (DPM), which is 80mm wider than the underlay padding to ensure ultimate moisture protection when installed. Popular, inexpensive and with a tog rating of 0.84.



FLOORMATE

Floormate provides an excellent moisture protection, and is ideal for areas of heavy foot traffic. Made from rubber, it incorporates a foil vapour barrier and is ideal for any floating floor installation because it combines comfort, support and good sound and thermal insulation.




UNDERMATE

If you've got underfloor heating, this low-tog underlay is the perfect solution. It has similar qualities to Floormate but a tog rating of just 0.55. When installed over underfloor heating, a damp proof membrane needs to be used as well.



SOLITEC

This specialist underlay has a strong adhesive top layer for the floor to bond to, making it ideal for floating solid wood or engineered boards. You don't need tape, glue or nails. It must be used in conjunction with a damp proof membrane to protect against moisture migration.

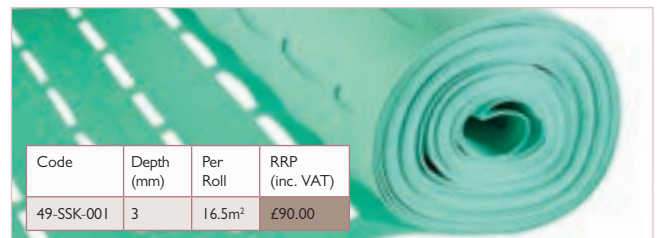

ACOUSTAMAT

If you are concerned about noise pollution, install an Acoustamat slatted underlay in conjunction with WP50 Sausages it forms a liquid batten system. The perforations are ideal for applying the adhesive and once installed it provides a reliable acoustic barrier. It's also great for uneven subfloors.


UNDERLAY & BARRIERS

CUSHION & PROTECT YOUR FLOOR



MOISTOP BARRIER PAPER

This moisture resistant barrier paper is perfect if you're using secret nails to secure a wooden floor over a timber-based subfloor. Its bitumen backing self-seals around the nail holes to maintain a watertight barrier and prevent your flooring absorbing moisture from below.

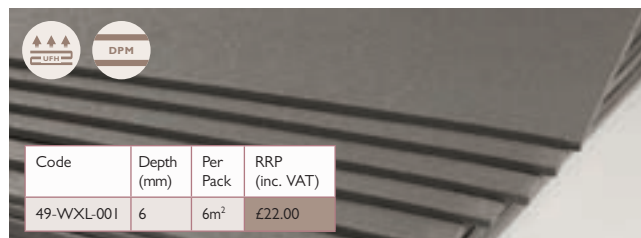

XL UNDERLAY

If your subfloor suffers from some minor dips (up to 3mm) XL Underlay can help solve the problem. It's made from lightweight extruded polystyrene and comes in packs of 10 tiles that are 500mm wide by 1200mm long. It offers exceptional sound and thermal insulation, and when taped together forms an effective moisture barrier. Tog rating: 1.1.



DAMP PROOF MEMBRANE (DPM)

Designed to be used in conjunction with a cushioning underlay, and to prevent moisture damaging your floor, this membrane is durable and strong with high puncture resistance. It's made from 1000-gauge high quality polythene.



VAPOUR TAPE

Use this self-adhesive foil tape when laying a Woodpecker moisture barrier, or products like our XL Underlay tiles. It not only blocks out moisture but is an easy way to strengthen joins.



BLUE DAMP PROOF BARRIER

This superior quality underlay is designed to protect your floor from a damp subfloor. Its dimpled surface allows air to flow beneath the barrier making it perfect for basements or recently screeded floors. The air circulation means a new subfloor can dry without delaying installation of your floor. You should still check atmospheric humidity, though. Tog rating: 1.5.



PROTECTALAY

Save clean-up time, control dust, dirt and debris during renovations with our temporary floor protection. The material provides a strong, moisture-resistant yet breathable shield which can be used to safeguard wood flooring during and after installation.

ADHESIVES & SEALANTS

FOR THE BEST SUBFLOOR PREPARATION



Code	Size (kg)	Covers (approx)	RRP (inc. VAT)
31-SMS-099	15	12-16m ²	£170.00

MS PARQUET ADHESIVE

Made specifically for use with Woodpecker floors, MS Parquet is recognised for its quality. In just 30 minutes, it will secure wood boards. Even once it's fully cured (after 24 hours), it is still flexible enough to accommodate the natural expansion and contraction of the wood between the seasons.



Code	Product	Size (cc)	Covers	RRP (inc. VAT)
23-LBS-001	Sausage	600	2m ²	£11.50
23-MAG-001	Bulk gun	N/A	N/A	£49.00

WP50 SAUSAGES

Applied using a bulk gun, this purpose-made adhesive is designed for use with Woodpecker's Acoustamat underlay to form a liquid batten system. The adhesive remains permanently flexible once cured, allowing for the expansion and contraction of wooden floorboards between seasons..



Code	Size (kg)	Covers Approx	RRP (inc. VAT)
31-WPA-505	0.5	5m ²	£7.00

FLOORING GRADE PVA

Woodpecker's flooring grade PVA is the ideal adhesive for bonding tongue and groove hardwood floorboards. It's highly concentrated, easy to apply, solvent-free and dries within four hours.



Code	Size (litre)	Covers Approx	RRP (inc. VAT)
23-LDP-001	5	25m ²	£167.00

WP60 LIQUID DPM

Apply this liquid membrane to your subfloor to prevent residual moisture from the concrete penetrating your natural wood floor. Using a roller, you can lay a seamless barrier and it's fully cured within 30 minutes. You only need one coat when used in conjunction with our MS Parquet adhesive.



Code	Size	Product	RRP (inc. VAT)
I2-LXC-001	20kg	Level-X	£35.00
I2-LXP-001	1L	Primer	£16.00

LEVEL-X & PRIMER

If your subfloor is uneven, solve the problem the natural way using gravity. First, prime the area, then pour on Level-X, our fibre-reinforced, self-levelling compound which can be trowelled into a smooth layer above the irregular surface. You can apply from 2 to 50mm in a single pour. With care, it can be feathered off to virtually nothing at the edges.



Code	Size (Litre)	Covers	RRP (inc. VAT)
31-WSP-001	5	N/A	£40.00

IIP SURFACE PRIMER

Does your Woodpecker flooring need to float on a dusty or porous subfloor? To improve surface adhesion, apply IIP Surface Primer before using our MS Parquet adhesive, WP50 Sausages, or WP60 DPM.

EXPERT TIPS

LEVEL-X SELF-LEVELLING COMPOUND & PRIMER

1 – Prepare the subfloor

The surface should be firm, cohesive and free of loose particles, dust, dirt and grease. The better the floor conditions, the stronger Level-X will be when it's dried.

2 – Priming

The subfloor needs to be clean and dry before you prime it. Follow the instructions on the package and apply the right amount of primer for the condition of the floor you're treating. The room must be at least 6°C, but the optimum temperature is 10-18°C.

3 – Mixing

Level-X comes as a powder and needs to be mixed with water using an electric mixer or pump until it has a smooth and even texture. If the temperature is optimum it will be useable for about 30 minutes after mixing.

4 – Application

If you're applying it to concrete, plaster, ceramic tiles or painted surfaces, you can pour on as required to a thickness between 2 and 50mm. For wooden floors the thickness should be between 5 and 50mm. If you are covering underfloor heating cables, the minimum thickness is 10mm.

5 – Building up a fall

A mix with reduced water content must be applied to form the high area, otherwise the compound will tend to flow down toward the lower points.

6 – Finishing

The length of time Level-X takes to dry depends on how much moisture is in the subfloor, but it's recommended you wait 12 to 18 hours before applying damp proofing.

ROUTINE CARE

PRODUCTS TO CLEAN AND PROTECT YOUR FLOOR



CLEANING KIT

Love your natural wood floor and keep it in tip top condition with a Woodpecker Cleaning Kit. The box includes our specially formulated Cleaning Liquid and a gentle spray mop with a refillable cartridge and washable cover. We've also popped in our Floor Cleaning & Care guide which is full of tips to help you ensure your floor looks its best and lasts even longer.

Code	Description	Pack Size (Litre)	RRP (inc. VAT)
77-CKO-001	Cleaning Kit for Oiled Wood Floors	1	£33.95
77-CKL-001	Cleaning Kit for Lacquered Wood Floors & Laminates	1	£33.95
77-COC-001	Cleaning Liquid for Oiled Wood Floors	1	£9.95
77-CLC-001	Cleaning Liquid for Lacquered Wood Floors & Laminates	1	£9.95



FLOOR PROTECTORS

Protect your floor from furniture feet – Woodpecker supplies a range of felt pads and castor cups to stop the dents, pressure marks and scratches caused by heavy furniture.

Code	Description	Size	Per Pack	RRP (inc. VAT)
05-FFP-951O	Heavy Duty Felt Pads (Round)	19mm	20	£5.00
05-FFP-952O	Heavy Duty Felt Pads (Round)	25mm	16	£5.00
05-FFP-953O	Heavy Duty Felt Pads (Round)	38mm	8	£5.00
05-FFP-947O	Heavy Duty Felt Pads (Various Sizes)	Multipack	-	£8.00
05-FFP-950O	Heavy Duty Felt Pads (Rectangular)	113x153mm	2	£8.00
05-FCC-363O	Castor Cups - Light Wood Grain	44mm	4	£8.00
05-FCC-364	Castor Cups - Light Wood Grain	60mm	4	£8.00



COIR MATTING

Coir matting is a great way of protecting your natural wood floor. When the floor is installed, lay coir mats at each entrance to trap dirt and grit that gets tracked into the house.

Code	Width (mm)	Per Roll	RRP (inc. VAT)
42-COI-010	1000	N/A	£38.00

LONG-TERM MAINTENANCE

KEEP YOUR WOOD FLOOR IN TIP-TOP CONDITION



Code	Size (Litre)	Covers m ² /L	RRP (inc. VAT)
81-OCS-002	2	N/A	£50.00

ONE COAT SOAP

If your Woodpecker floor has an oiled finish, clean it with One Coat Soap. Mix with 150ml of water for everyday use. Do not use for three weeks after using One Coat Oil.



Code	Size (Litre)	Covers m ² /L	RRP (inc. VAT)
81-OCC-001	1	N/A	£33.00

ONE COAT CLEANER

Clean and strip the surface of your oiled floor with One Coat Cleaner. After 15 minutes to one hour of drying time, you can then apply Woodpecker One Coat Oil.



Code	Size (Litre)	Description	Covers m ² /L	RRP (inc. VAT)
81-OCO-001	1	Pure (enriches)	40-50	£95.00
81-OCN-001	1	Natural (lightens)	40-50	£120.00

ONE COAT OIL

The rich natural colours and textures of your wooden floor will be restored to their original lustre with our One Coat Oil. It'll enliven the grain, and protect your floor with just one coat.



SCRATCH REPAIR STICKS

Our Scratch Repair Sticks are great for filling and hiding deep scratches. The colours can be blended to match any wood or laminate floor in our catalogue.

Code	Colour	RRP (inc. VAT)
02-SPS-001	Various	£12.00



SCRATCH COVER

Cover scuffs, chips, scratches and other minor marks in the surface of wood flooring. The easy-to-use liquid allows you to build up colour to the right shade and restore your floor in an instant.

Code	Size (ml)	Colour	RRP (inc. VAT)
02-SCD-001	100	Dark	£12.00
02-SCM-001	100	Medium	£12.00
02-SCL-001	100	Light	£12.00



TOUCH UP OIL

Conceal dents and scratches on your oiled floor quickly and easily by applying Touch Up Oil using a lint-free cloth onto the affected area and leave to dry. Buff lightly to remove any residue.

Code	Size (ml)	Finish	RRP (inc. VAT)
02-TUO-080	75	Oil Pure	£14.00
02-TUO-081	75	Oil Natural	£14.00

TECHNICAL

Digestible guides to fitting a Woodpecker floor

A natural Woodpecker floor is at its most beautiful and enduring when installed with consideration and care. If you're looking after the fit, make sure the result is just as you'd hoped by taking the time to read our installation advice over the next few pages.

The following guides take you through every step that goes into a reliable and impressive installation. Understand the procedures required before the flooring even arrives with our recommendations for acclimatisation and room humidity checks. Plus, get tips for starting off, laying directions and staggering boards for effect.

Whether you're floating, sticking or secret nailing a Woodpecker floor, you'll find all the information you need to ensure the fit goes swimmingly. And we've covered the tricky bits, including expansion gaps, fitting around pipes and door jambs. There's also some advice on laying over underfloor heating to help you take precautions before, during and after installation.

If you need any further help, we're always happy to advise. Pop us an email at info@woodpeckerflooring.co.uk or call on 02920 888 223 and our technical team will chat through your query.

INSTALLATION PREPARATION

BEFORE DELIVERY

The conditions must be ideal before any flooring is laid. Wet trades like concreting, plastering and decorating need to be complete and the building must be thoroughly dried out. Windows and doors should be fitted and watertight.

EXPERT TIP

A rule of thumb for the drying time of a sand and cement-based screed is one day per millimetre for the first 50mm, and 2.5 days for each millimetre thereafter. So, a 50mm screed should take about two months to dry out, and a 100mm screed will take six months. Plaster takes up to six weeks to dry completely.

PREPARING THE SUBFLOOR

The surface immediately beneath a Woodpecker natural wood floor must be in good structural condition, free from damp rot, fungal or insect infestation, and contaminating residues. It must be flat with bumps and dips not exceeding 3mm over a 2m area. Naturally, the surface should be vacuumed and totally free of debris before fitting begins. Hot pipes should be well insulated to prevent localised hotspots, which can cause wood flooring to warp or shrink.

N.b The subfloor should be prepared for installation in accordance with the industry standards outlined in BS-8201-2011.

HEATING AND AIR CONDITIONING

The room temperature and humidity levels need to be stable before Woodpecker flooring is delivered to site. Heating and/or air conditioning systems should be on and working for at least two weeks before the floor is laid. If underfloor heating is present, multi-layered planks such as engineered board, bamboo or laminate should be chosen over solid wood as these provide better stability. Install solid wood flooring over an underfloor heating system at your own risk!

EXPERT TIP

ATMOSPHERIC CONDITIONS

The room temperature shouldn't be lower than 18°C (64°F), or the floor temperature lower than 15°C (59°F). The Atmospheric Relative Humidity should be between 40 and 60%. Note that wood floors are not suitable for wet rooms, or in areas where there is a regular flow of water.

ACCLIMATISATION

Nature is in no hurry when it produces trees, and likewise, an impressive wood floor installation is never rushed. The sealed, unopened boxes should be laid flat, in the centre of the room for a period of time beforehand. Laminate will acclimatise over

24 hours, engineered and bamboo flooring takes three or four days, and solid wood requires five to seven days. **DO NOT** store the flooring outdoors, in an outbuilding, or anywhere with damp or condensation problems. The conditions where the flooring is acclimatised should be as close as possible to the typical living conditions.

INSPECTION

At Woodpecker the highest quality control procedures are in place, however our products are made from natural materials so it's essential that every plank is carefully checked before installation. If there are any problems, get in touch with us so that we can rectify them. We can't consider any defects after the floor has been installed.

LAYING THE FLOOR

The natural texture of Woodpecker flooring will really come to the fore if the planks are laid in the same direction as the light entering the room. However, if the flooring is being laid over an existing wooden boarded floor, it should be positioned at right angles to the previous flooring planks.

To create a beautiful balance of colour across the floor, lay planks sympathetically, mixing lighter and darker shades. Woodpecker floors feature natural colour variations that are true to the character of timber meaning some boards vary in shade to others.

We recommend that our flooring is installed by an experienced fitter. Because wood is an organic product, it's susceptible to slight changes over time and someone with a professional eye is best placed to assess the situation before installation begins.

Disclaimer: Installation guidance is advisory and is based on established good practice and the BS-8201-2011 standard. It is the fitter's responsibility to follow these procedures before, during and after installation. Woodpecker cannot accept responsibility for any issues relating to installation.

EXPERT TIP

MOISTURE TESTING

Moisture is the enemy of natural wood, and can damage your beautiful flooring. Even when your subfloor looks dry, it may contain excess moisture in the substrate. Using a professional moisture meter such as the Protimeter MMS will tell you whether or not it's safe to go ahead with installation. Readings shouldn't exceed:

- 70% Relative Humidity (RH) for cement-based concrete
- 11% Wood Moisture Equivalent (WME) for wooden subfloors or joists.

INSTALLATION

USING ADHESIVE



Tongue and groove floor planks can be fixed directly to a concrete subfloor using Woodpecker Parquet MS Adhesive.

Designed specifically for our natural wood flooring, it holds the planks after a short open-time while remaining flexible enough to allow for the expansion and contraction of the timber between seasons.

Depending on the condition of the subfloor, a 3 or 4.8mm notched trowel should be used to spread the adhesive evenly across the entire surface. It's essential that there's a full bond between each floorboard and the surface beneath.

EXPERT TIP

DON'T OVERGLUE

Never glue the tongue and grooves together if you choose to fully stick down a wood floor. Too much pressure will be placed on the boards and they could crack.

PREPARATION CHECKLIST

- ✓ **Is everything dry?**
The plaster in the room and cement subfloor should be completely dry before the wood floor is fitted. The drying time for a cement-based screed is one day per millimetre for the first 50mm and 2.5 days per millimetre thereafter.
- ✓ **Is the subfloor level?**
If the subfloor needs to be levelled, apply our Level-X™ Primer followed by Level-X™ Self-Levelling Compound, which is fibre reinforced. Never use latex self-levelling compounds. They lack the tensile strength to resist the movement of the timber.
- ✓ **Is the subfloor within moisture tolerance?**
A cement-based screed must have a Relative Humidity (RH) reading of 70% or less. If not, always use Woodpecker WP60 Liquid Damp Proof Membrane which seals the moisture below the surface preventing the wood from absorbing it and expanding or distorting. Make sure the floor is completely free of dust and contaminants before applying the damp proof. Wooden subfloor readings need to be between 7 and 11% Wood Moisture Equivalent (WME).
- ✓ **Has the wood acclimatised?**
Wood flooring must be left to acclimatise before fitting. To do this, place the packs in the centre of the room where the flooring will be laid. Test its wood moisture level and make sure it is similar to that of the wooden subfloor before fitting to prevent undue expansion or contraction. If the moisture readings aren't close, use a different method to fit the flooring.
- ✓ **What is the Atmospheric Humidity in the room?**
It should be between 40 and 60%.
- ✓ **Is there underfloor heating?**
If so, it must be thoroughly tested, and turned off 48 hours before fitting.

INSTALLATION

FLOATING



Floating a floor just means that the boards are loose laid over the subfloor rather than glued, nailed or screwed down.

A floating floor can be installed on concrete, anhydrite, existing wood floor, chipboard, ceramic tiles, PVC and linoleum – but not carpet. Underlay should be laid edge-to-edge perpendicular to the direction of the floorboards. Stick it together with tape. If the underlay also provides a damp proof membrane, always use Woodpecker Vapour Tape to stop moisture from rising between the seams. Don't overlap the underlay unless it's designed for it.

With the underlay down, start laying the first plank of flooring in the corner of the room with the tongue (for tongue and groove) or the top lip (for loc/clic) facing the wall. Don't forget the expansion gaps (see page 140). Make sure all the boards are tightly joined or glued together by carefully using a tapping block or pulling iron. The off-cut from the final board in each row can be used to begin the next row providing it measures 200mm or more. For the best appearance, stagger the ends of the boards (header joints) by at least 300mm.

PREPARATION CHECKLIST

- ✓ **Is everything dry?**
The plaster in the room and cement subfloor should be completely dry before fitting the flooring. The drying time for a cement-based screed is one day per millimetre for the first 50mm and 2.5 days per millimetre thereafter.
- ✓ **Is the subfloor level?**
If the subfloor needs to be levelled, apply our Level-X™ Primer followed by Level-X™ Self-Levelling Compound, which is fibre reinforced. Never use latex self-levelling compounds. They lack the tensile strength to resist the movement of the timber. Minor undulations can be disguised using the Woodpecker XL Underlay.
- ✓ **Is the subfloor within moisture tolerance?**
A cement-based screed must have a Relative Humidity (RH) reading of 70% or less. Wooden subfloor readings need to be between 7 and 11% Wood Moisture Equivalent (WME). If there's any doubt about moisture levels in the subfloor, use an underlay with an integral damp proof membrane and lay this with the barrier side down to form a protective layer.
- ✓ **Has the wood acclimatised?**
Never unload the flooring and start fitting. It should acclimatise in the centre of the room where it's going to be laid. Laminate will acclimatise over 24 hours, Engineered and bamboo flooring takes three or four days, and solid wood requires five to seven days.
- ✓ **What is the Atmospheric Humidity in the room?**
It should be between 40 and 60%.
- ✓ **Is there underfloor heating?**
If so, it must be thoroughly tested, and turned off 48 hours before fitting.

LOC SYSTEM

Although it's not always possible, it's easiest to fit the floor if you 'loc' down the boards in complete rows rather than individually. When connecting the header joints, insert the board into the lip at an angle of 30° and at the same time move the board closer and lower into position. It should 'loc' into place. If it won't go, don't force it. Check the board for dirt, excess lacquer or any other obstruction, remove that, and try again.

CLIC SYSTEM

When installing, align the long edge of the board first and simply 'clic' into place. Using a tapping block, gently knock the header joint up towards the previous board until they snap together. These instructions are only advisory and you may find installation easier if you connect all the header joints first along their long edges, positioned as a group, with the rest of the flooring later added in strips.

TONGUE AND GROOVE

When laying a floating floor, you should glue tongue and groove boards together for stability, and to stop squeaking. Run a continuous generous bead of adhesive along the groove of the long side and header joint of a plank. Avoid applying to the back of the groove as this doesn't provide a stable bond. Slide it towards the long edge of the facing tongue with the header joint connected, then tighten with a tapping block or pulling iron as necessary.

INSTALLATION

NAILING



A tongue and groove wood floor can be secret nailed to an existing timber subfloor or, as long as the flooring has a suitable thickness, fixed directly to joists for a structural floor.

A structural floor needs to be 18mm or thicker according to building regulations, however we usually recommend that sheets of plywood or chipboard are laid over the joists first. This helps to prevent any surface irregularities and should make for a sturdier finished floor.

Whatever subfloor is in place, it needs to be of a suitable width and thickness in order to hold 50mm cleats fired into it at a 45° angle. Joists should be kiln dried to avoid cupping or expansion and must be spaced in accordance with building regulations. The space between joists is predetermined but we recommend a maximum of 400mm intervals otherwise.

When secret nailing to the subfloor, or joists, always use a Woodpecker Moistop Barrier Paper, overlapping it by 200mm. The bitumen backing self-seals around the nail punctures for a watertight barrier. Use a moisture-resistant adhesive tape to secure the joins in the paper.

Flooring should be fitted at 45° or 90° to the subfloor and nailed over every joist, through the barrier paper if applicable. You can have header joints that aren't above a joist, as long as the boards either side fully span at least two joists. Cleats should be no more than 400mm apart.

PREPARATION CHECKLIST

- ✓ **Is the area completely dry?**
Remember, a 75mm thick cement subfloor takes 3 and a half months to dry properly.
- ✓ **Is the subfloor clean and safe?**
Make sure it is free of damp rot, fungal or insect infestation. It should be level to within 3mm over a 2m area, and clear of any debris.
- ✓ **Is the subfloor thick enough?**
It must be able to hold a 50mm cleat fired into it at a 45° angle.
- ✓ **Central heating pipes?**
Make sure they're insulated to prevent isolated hot spots, which can warp your floor.
- ✓ **Is there underfloor heating**
If so make sure it is fully working, and turn it off 48 hours before laying the floor. Remember, we don't recommend laying solid wood flooring over underfloor heating.
- ✓ **Have you checked the subfloor's moisture level?**
It should be between 7 and 11% Wood Moisture Equivalent (WME), and your new flooring should be acclimatised in the same room so that its WME is at a similar level. Acclimatisation takes 24 hours for laminate boards, three to four days for engineered and bamboo flooring, and five to seven days for solid wood.
- ✓ **What is the Atmospheric Humidity in the room?**
The reading should be between 40 and 60%.

EXPERT TIP

IT'S NAILS OR GLUE, NOT BOTH

Never use adhesive to glue between boards if it's being nailed down. The glue will inhibit the natural flexibility of the flooring and could cause cracks.

INSTALLATION


THE TRICKY BITS

THE FIRST ROW

Before installation can begin a few calculations need to be done, and you might have to do some cutting before you can start laying. Consider the layout of the room including the direction of the light – a wood floor looks more natural if the planks run towards the light shining into the room. Also look at the layout, walls, doorways and other obstacles. When you've chosen your starting wall, measure the width of the room from there and divide that by the width of the flooring panels. This will give you the number of rows of boards you'll lay and the width of the last row. If your last row is going to be under 60mm wide, cut the boards in your first row lengthwise accordingly so that your last row isn't too narrow.

FOLLOW THESE STEPS WHEN LAYING

1. Check all panels for possible damage or defects. We can't be held responsible for imperfect boards once they've been fitted.
2. Starting from the left hand corner of the room, lay the first row of flooring with the tongue (tongue and groove) or top lip (loc/clic) to the wall.
3. Put spacers between the edge of the flooring panels and the walls to provide an appropriate expansion gap.
4. Mark then cut the last panel in the first row to the required length, then use the remainder of the last panel to start the second row of flooring. This staggered effect makes for a more appealing floor and reduces waste.
5. Always make sure the off-cut is at least 200mm in length. If not, cut a piece longer than 200mm for your first board in the next row. In addition, make sure that all short ends are staggered so that there's no less than a 30mm gap between joints in adjacent rows.
6. Start all subsequent rows with the previous off-cut.



PIPES

Measure the position of any central heating pipes and mark them on the panel, considering your expansion gap. Drill a hole 16mm (5/8") larger than the pipe's diameter. Saw at a 45° angle to the pipe hole. When you've fitted the board around the pipe, apply glue to the sawn out piece of wood and fit it with a pull bar, again taking into account the expansion gap spacers.

DOOR JAMBS AND ARCHITRAVES

If there is a wooden door jamb, we recommend undercutting it according to the thickness of the flooring, plus the possible underlay. Install the flooring underneath the door jamb but leave the necessary expansion gaps.



EXPANSION GAPS

As wood is a natural substance, it will expand and contract with changes in temperature and humidity. That's why when a wood floor is laid, expansion gaps need to be left wherever the boards meet a wall, structural support, stairs, breakfast bar, fitted furniture, fireplace, central heating pipe... etc. Gaps must also be considered at doorways to allow for the differing expansion between rooms. It's also worth considering the slight effect heavy furniture could have on the flooring.

To allow for expansion gaps, spacers should be used at regular intervals when fitting and then removed before skirting boards, beading or trims are put in place. The points below might help you determine how much space to leave...

- The gap for wooden or bamboo flooring should be calculated on the basis of 2mm per metre span across the floor, with a minimum of 10-15mm regardless. For areas over 8m in width (or 5m if it is a solid wood floor), extra provisions should be made for the expansion.
- Because we cut them following their natural grain, wood floor panels expand more across their width than length. It's important to consider this when the boards are installed in the direction of the room's width.
- Wembury laminate floors require an expansion gap of at least 8mm.
- Allow a gap of 2-3mm for Brecon laminate floors.
- Skirting boards should be fixed to the wall and shouldn't obstruct the movement of the floor in any way.
- We've got a whole range of products for concealing gaps at floor transitions and edges starting on page 118

INSTALLATION

UNDERFLOOR HEATING

CHOOSING A FLOOR

Just like a natural wooden floor, underfloor heating helps make a room feel comfortable and cosy. However, if you have underfloor heating, it's important you choose the right wooden floor to go with it. We always recommend an engineered board rather than solid wood. It will give you increased stability and strength to withstand changes in temperature thanks to its multi-layered construction.

Not all timbers react well to underfloor heating, but the good news is that each type of flooring in this catalogue carries a recommendation with it so you'll easily be able to tell which ones are suitable, and which aren't.

CHECKING THE SUBFLOOR

Never install underfloor heating over a concrete subfloor that has a moisture content over 75% Relative Humidity (RH). Ideally it should be below 70% RH to give a margin of error.

If the moisture levels in the subfloor are too high, further drying out is advised. Although a Woodpecker damp proof preparation can hold back a certain amount of residual moisture, where there are higher levels of moisture, the presence of underfloor heating can increase the pressure below the moisture barrier and cause sweating and possible failure.

CHOOSING A SYSTEM

If you are installing an underfloor heating system before fitting a natural wood floor, there are two types available – water heated, and electrically heated.

In general, water heated systems are used in new builds and in renovation projects, while electrically heated systems are used when installation needs to be relatively quick and easy.

Whichever system you choose, it needs to be designed with wood flooring in mind. The design layout of the system also needs to take account of any rugs or low furniture that may trap heat against the wood floor.

TESTING THE HEATING

Once the underfloor heating is in place it should be switched on and thoroughly tested before the wood floor is fitted. A water-heated system needs to be pressurised, checked for leaks, and left to run for two weeks. It will dry out much of the moisture in the screed or timber subfloor.

Plastering and any other wet trade in the room must also be dried out and the Atmospheric Humidity in the room should be between 70 and 65%.

EXPERT TIP

Ensure the system is calibrated so that the temperature to the underside of the wood floor never reaches more than 27°C, even if the thermostat setting is increased.

EXPERT TIP

Isolated hot spots in your floor should be avoided so consider fitting an additional insulating layer if the heating pipes or elements are close to the surface. And remember that rugs and runners can trap heat, raising the temperature above the maximum recommended level.

FITTING THE FLOOR

Turn off the underfloor heating for at least 48 hours prior to fitting the floor – the regular central heating or electrical heating can be left on during installation.

If a screed or wood-based subfloor has been laid above the underfloor heating system, we recommend that an engineered tongue and groove floor is fully bonded down. This provides the most stable solution over underfloor heating as the board joints are free to expand and contract with differing levels of temperature and moisture, whereas a glued joint forms a rigid floor which is not able to flex. Make sure the boards are fully adhered to the subfloor using Woodpecker MS Parquet Adhesive.

An engineered floor with glueless locking joints can be floated over underfloor heating in most cases, but be certain to use an underlay that's suitable for an underfloor heating system.

If only part of the subfloor has underfloor heating, you will need to separate the wood flooring above the heated and unheated areas using a dilation joint. Flooring above the underfloor heating will expand and contract more than the flooring that isn't, but the joint will accommodate that.

AFTERCARE

Once fitted, the floor should be left to acclimatise for two to three days before the underfloor heating is turned on. This will allow it to settle and any adhesives used can dry out.

EXPERT TIP

When the heating is switched on it should be set at 1°C above the ambient temperature and then raised by a further 1°C per day until the desired temperature is reached. Do not turn it on full straight away. Raising and lowering the temperature too quickly can cause the wood to shrink, expand or even crack.

This method of gradually changing room temperatures should be continued, with the underfloor heating left running from the thermostat at all times and only raised or lowered by 1°C per day to accommodate the changing seasons.

These guidelines are here to help make sure you protect your natural wood floor but they don't replace the recommended fitting procedures for your underfloor heating system, which vary by manufacturer.

NINE USEFUL CLEANING AND MAINTENANCE TIPS

SHORT TERM CARE



Once your Woodpecker floor has been installed you'll be able to feel its delightful texture underfoot and enjoy the warm sense of nature a wood finish brings to your home. However, like all natural substances, wood is susceptible to wear and tear. To ensure it always looks its best and lasts longer, here are some steps you can take to protect it...

1 - FLOOR MATS

The natural place to start is at the door, and a good quality floor mat will catch dirt and grit, preventing damage further into to your home. Grit underfoot is like sandpaper, scratching the floor's finish, so consider fitting Woodpecker Coir Matting which provides a barrier to wet and dirty feet.

2 - RUGS OR CARPET RUNNERS

We know that the last thing you want to do is cover up the beautiful texture of your natural wood floor, but sometimes prevention is better than the cure. Consider rugs or carpet runners for high footfall areas such as doorways, halls and stairs.

3 - BE CAREFUL WITH FURNITURE

Never drag furniture or other objects across your wood floor – it can easily result in unsightly dents or scratches. Woodpecker offers a variety of felt protectors and castor cups that enable you to move furniture easily without marking your floor.

4 - SHOE RULES

Avoid wearing heavy shoes or work boots when stepping onto your natural wood floor. High heels, and stilettos in particular, should be avoided. They exert a huge amount of pressure that easily dents or marks even the toughest of wood floors.

5 - CLEAN UP SPILLS

Liquid is the enemy, so mop up any spilled drinks and never allow water or other liquids to sit for any length of time. The odd drop may not hurt, but excessive amounts of water will cause lasting damage.

6 - PET PATROL

Nothing's more natural than a dog or cat curled up by the fire, asleep on your wood floor. But remember to keep your pet's claws trimmed to prevent scratches and, as with point five, if there are any 'accidents' make sure they're cleaned up fast.

7 - SUNSHINE

It's thrilling to see the sun illuminating a wood floor, filling the room with natural light and warmth. Sunlight will naturally help the wood's colour to mellow, so be aware of this and move rugs, mats and furniture regularly to ensure an even maturing of colour. Dark woods like Walnut are more susceptible to fading, which is worth considering when you choose your flooring. Excessive exposure to direct sunlight can also cause the floor to overheat, which can lead to shrinkage, warping and splitting. Consider shading your floor from large windows that face the sun.

8 - LIGHT CLEANING

Regular sweeping with a soft bristled broom will get rid of dust and rogue bits of grit on the floor. You can also vacuum a natural wood floor – ideally with a soft brush attachment to minimise scratching.

9 - MOPPING

As per point five, wetness can damage a hardwood floor so always use a well-wrung mop when cleaning and remove excess liquid immediately. Woodpecker supplies specially formulated cleaning kits that include a gentle spray mop, Cleaning Liquid and Care Guide. They are available for both lacquered and oiled finishes, with refills available as necessary.

EXPERT TIP

A DROP OF OIL

Install a Woodpecker natural wood floor with an oil finish and, within reason, you'll be able to repair scratches and other blemishes. Simply apply wood oil where the scratch has occurred, rub it in, and soon the offending mark will blend in with the rest of the oiled floor.

MAINTAINING A BEAUTIFUL NATURAL FLOOR

LONG TERM CARE

LONG TERM CARE

Even though the most advanced wood treatments and finishes are used to create our nature inspired flooring, your hardwood floor will need to be looked after to stay in tip-top condition. This involves cleaning and sometimes re-finishing your flooring at suitable intervals to ensure it continues to delight throughout its lifetime.

CLEANING OILED FLOORS

To protect the beautiful look and feel of your oiled floor, we recommend removing grit and dust regularly with a brush or vacuum cleaner. You can also use the Woodpecker Cleaning Kit for Oiled Floors or a well wrung damp cloth mop.

For a deeper clean now and again, use Woodpecker One Coat Soap. This clever product will clean your floor and form a protective film, helping to build its surface resistance over time and making your floor even easier to maintain.

CLEANING LACQUERED FLOORS

Ensure your lacquered floor stays clean and keeps its stunning shine by using the Woodpecker Cleaning Kit for Lacquered & Laminate Floors or a well wrung damp mop.

RESTORATION TREATMENTS FOR WOOD FLOORING

How often you recoat or repair your floor will depend on several factors including the type of floor it is, its finish and the wear its experienced. However, as a basic preventative, you might consider recoating your floor every two or three years. Don't wait until your floor looks worn. If you allow the protective coat to wear away, it becomes susceptible to dirt and water penetration and harder to clean and repair.

A QUICK TEST

A good way to check whether your floor needs treatment is to pour a few drops of water onto its surface. If the finish is in good order, the water will bead on the floor and can easily be wiped away. No maintenance is needed. If the water slowly soaks into the timber, leaving behind a light saturation mark, the finish is starting to wear thin. A new coat of lacquer or oil should be applied. However, if the water is immediately absorbed and leaves a dark stain, the finish has been completely worn away and the floor may need sanding and recoating.

NB: Before any treatment is carried out, we recommend testing in an inconspicuous area of the floor to check compatibility.

LAMINATE FLOOR REPAIRS

Because of its construction and finish, a laminate floor cannot be treated in the same way that a hardwood or engineered floor can. However, small chips and scratches can be concealed using a repair paste.

RE-LACQUERING & REPAIRS

If your lacquered floor gets any isolated scratches or dents, these can be sealed using Woodpecker Touch-Up Lacquer. First, make sure the area is clean and dry then lightly sand the surface with a fine grit sanding paper. Using the brush supplied in the lid, paint the lacquer onto the affected area and leave it to cure.

Deeper scratches or gouges might call for professional wood filler. These are available in a variety of colours from most hardware and flooring retailers. They come as a paste, which is applied to the damaged area, left to cure, then sanded. Afterwards, apply some Woodpecker Touch-Up Lacquer to give the repair a protective finish.

Extra care is needed when sanding stained floors to ensure that the process doesn't break through the complete layer of stain. In this instance, the floor would require a patch-repair before the lacquer is applied.

If the floor is badly worn in some places, it may be necessary to sand the flooring back to its unfinished surface before recoating all over. Unlike oil, lacquer doesn't penetrate the wood's surface, instead it sticks to it. Therefore, the entire floor must be covered to prevent the formation of ridges and overlap marks. For best results, use a roller. A single coat of lacquer will be enough to protect against moisture, though several coats should be applied if the floor faces lots of foot traffic.

If you are lacquering unfinished timber, you will need to cover it with three coats. Between each coat, the floor must be sanded, vacuumed and wiped thoroughly with a damp cloth. Lacquer takes one to two hours to dry between applications. After the final coat, leave the floor for 24 hours before stepping onto it. Curing will continue for a week, after which rugs can be placed on the floor.

RE-OILING & REPAIRS

Unlike lacquered floors, isolated areas of an oiled floor can be treated without having to re-oil the entire floor. Yet, oiled surfaces aren't as tough as lacquered surfaces and need to be maintained more often.

Before re-oiling your floor, it's essential that you clean up any dust or dirt that's accumulated. Contamination will hinder adhesion and could affect how the floor looks. Apply a small amount of One Coat Cleaner to a dry cloth and wipe the affected area thoroughly. Dust will be collected electro-statically. It takes 15 minutes to an hour to dry depending on the saturation. If the floor remains soiled, consider sanding the surface and clean again with One Coat Cleaner.

Make sure the floor is completely dry before applying Woodpecker One Coat Oil. This should be applied sparingly and evenly, along the wood's grain, using a cotton cloth, brush or squeegee. The oil will react with the floor within a minute and any excess should be wiped away within 15 or 20 minutes making sure the surface is nearly dry. Because the oil reacts so quickly, it's a good idea to treat relatively small areas each time. Oil doesn't leave tide or overlap marks and should be left for 24 to 36 hours before you can stand on the floor again or it's cleaned.

PACK CALCULATOR

LET US DO THE HARD WORK FOR YOU...

RANGE	PER PACK M ²									
	1	2	3	4	5	6	7	8	9	10
SOLID										
YORK	1.98	3.96	5.94	7.92	9.9	11.88	13.86	15.84	17.82	19.8
YORK WALNUT	2.29	4.58	6.87	9.16	11.45	13.74	16.03	18.32	20.61	22.9
ENGINEERED										
SALCOMBE 3-STRIP	3.587	7.174	10.761	14.348	17.935	21.522	25.109	28.696	32.283	35.87
SALCOMBE	2.81	5.62	8.43	11.24	14.05	16.86	19.67	22.48	25.29	28.1
HARLECH 148MM	1.65	3.3	4.95	6.6	8.25	9.9	11.55	13.2	14.85	16.5
HARLECH 188MM / 240MM	2.1	4.2	6.3	8.4	10.5	12.6	14.7	16.8	18.9	21
BERKELEY	2.11	4.22	6.33	8.44	10.55	12.66	14.77	16.88	18.99	21.1
GOODRICH	1.296	2.592	3.888	5.184	6.48	7.776	9.072	10.368	11.664	12.96
CHEPSTOW	2.11	4.22	6.33	8.44	10.55	12.66	14.77	16.88	18.99	21.1
CHEPSTOW DISTRESSED	1.444	2.888	4.332	5.776	7.22	8.664	10.108	11.552	12.996	14.44
BAMBOO										
OXWICH STRAND BAMBOO	1.498	2.996	4.494	5.992	7.49	8.988	10.486	11.984	13.482	14.98
LAMINATE										
WEMBURY	1.99	3.98	5.97	7.96	9.95	11.94	13.93	15.92	17.91	19.9
WEMBURY (WIDE)	2.53	5.06	7.59	10.12	12.65	15.18	17.71	20.24	22.77	25.3
WEMBURY (HONEY / DUSKY OAK)	2.54	5.08	7.62	10.16	12.7	15.24	17.78	20.32	22.86	25.4
BRECON	2.2	4.4	6.6	8.8	11	13.2	15.4	17.6	19.8	22

WOODPECKER FLOORING - TERMS & CONDITIONS OF SALE

In the unlikely event that goods are delivered wrong or damaged, it is the responsibility of the customer to ensure sufficient time is allowed for a replacement to be sent.

1. DEFINITIONS

In these terms and conditions, the following words shall have the following meanings:

"Buyer" shall mean any person, firm or company, to whom the Company supplies Goods or Services or with whom the Company enters into negotiations for the supply of Goods or Services.

"Company" shall mean Woodpecker Trading Co Ltd.

"Goods" shall mean products, articles or things which are supplied by or which are the subject of negotiations for supply by the Company to the Buyer.

"Services" shall mean services are supplied by or which are the subject of negotiations for supply by the Company to the Buyer.

2. MAKING THE CONTRACT

2.1 The Company's salesmen are not authorised representatives and are not authorised to accept confirm or vary any order nor to make any representation or promise on the Company's behalf.

2.2 Any estimate/quotation which comprises an invitation to treat is open for a period of 30 days only from the date thereof, provided that the Company has not previously withdrawn it. Any order issued by the Buyer is subject to acceptance by the Company and a contract will only be formed when the Company has accepted the Buyer's offer to buy in writing. Any offer made by the Buyer must be confirmed in writing by the Buyer.

2.3 All orders are placed under these terms and conditions alone. 2.4 These terms and conditions exclude any other terms and conditions inconsistent therewith which a Buyer might seek to impose even though such other terms and conditions may be submitted in a later document and/or purport to exclude or supersede any terms or conditions with them or may be contained in any offer acceptance or counter-offer made by the Buyer.

2.5 All floors supplied by the Company must be fitted in accordance with BS8201 (2011).

2.6 No variation of these terms and conditions is permitted unless expressly accepted by a Director of the company in writing.

3. CANCELLATION

3.1 No cancellation by the Buyer is permitted except where expressly agreed by a Director of the Company in writing.

3.2 The Buyer will in the event of agreed cancellation by the Buyer indemnify the Company fully against all expenses incurred up to the time of such cancellation together with by way of liquidated damages a sum of 33 1/3% of the contract price which shall be paid by the Buyer to the Company forthwith.

4. PRICE

4.1 All prices quoted are those ruling at the date of dispatch or supply.

4.2 Unless otherwise stated all prices quoted are net, exclusive of VAT, and in the case of Goods ex works.

4.3 The Company reserves the right at any time prior to delivery of the Goods or supply of Services to adjust the price to take account of any increase in the cost of raw materials, labour or services or any currency fluctuations affecting the cost of imported materials or services.

5. TERMS OF PAYMENT

5.1 All sums become due and payable under these terms and conditions not later than 20th of the month following date of invoice.

5.2 Time for payment shall be of the essence.

5.3 The Company reserves the right to charge interest at 2.5 per centum per month on all overdue accounts, such interest being deemed to accrue on a day to day basis from the due date for payment under clause 5.1.

5.4 If the Buyer (being a Company) has a petition for its winding-up or passes a resolution for voluntary winding-up otherwise than for the purpose of a bona fide amalgamation or reconstruction or compounds with its creditors or has a receiver appointed or all or any part of its assets or (being an individual) becomes bankrupt or insolvent or enters into any arrangement with its creditors or commits a material or serious breach of this Agreement (and in the case of such a breach being remediable fails to remedy it within 7 days of receiving notice to do so) he will be deemed to have repudiated the Contract.

5.5 The Company reserves the right at any time at its discretion to demand security for payment before continuing with or delivering any Order, supplying any Goods or Services.

5.6 The Buyer accepts that in the event of non-payment within the payment period the Company will resort to legal action to recover the debt in this instance a 20% surcharge will be added to the outstanding amount to cover administration and agents fees.

5.7 Where the Buyer is a company the directors agree to guarantee payment personally, both jointly and severally, of any outstanding amounts due in the event of their company being unable to meet its financial commitments or becoming insolvent.

6. DELIVERY

6.1 Delivery will be deemed to have been effected when the Goods are ready for collection at the premises of the Company or as the case may be the premises of the suppliers to the Company in circumstances where the Goods are delivered direct from such suppliers.

6.2 Time of delivery is not of the essence.

6.3 The Company shall not be liable for any loss whatsoever or howsoever arising caused by its non-delivery or by the failure to make Goods ready for collection on the due date.

6.4 The Company reserves the right to make delivery by instalments and to tender a separate invoice in respect of each instalment.

6.5 When delivery is to be by instalments or the Company exercises its right to deliver by instalments under clause 6.4 hereof or if there be delay in the delivery of any one or more instalments

for whatever reason this will not entitle the Buyer to treat the contract as repudiated and/or to damages.

6.6 Deviations in quantity between the Goods delivered and Goods ordered representing not more than 10 per cent by value shall not give the Buyer any right to reject the Goods or to claim damages and the Buyer shall be obliged to accept and pay at the contract rate for the quantity of the Goods delivered.

7. SUPPLY OF SERVICES

7.1 Time for the supply of Services is not of the essence.

7.2 The Company shall not be liable for any loss whatsoever or howsoever arising caused by its failure to supply Services or any part thereof on the due date.

7.3 The Company reserves the right to supply Services by instalments and to tender a separate invoice in respect of each instalment.

7.4 When the supply of Services is to be by instalments or the firm exercises its right to supply Services by instalments under clause 7.3 hereof or if there be a delay in the supply of any one or more instalments of Services for whatever reason this will not entitle the Buyer to treat the contract as repudiated or to damages.

7.5 Deviation in the quantity between Services supplied and the Services ordered representing not more than 10 per cent by value shall not give the Buyer any right to reject the Services or to claim damages and the Buyer shall be obliged to accept and pay at the contract rate for the quantity of the Services supplied.

8. RISK AND THE PASSING OF PROPERTY IN GOODS

8.1 Risk in the Goods shall pass to the Buyer when the Goods are delivered.

8.2 Notwithstanding risk in the Goods passing in accordance with clause 8.1 hereof title in the Goods shall not pass to the Buyer until whichever shall be the first to occur of the following:-

8.2.1 Payment being received by the Company for the Goods and Services and no other amounts then being outstanding from the Buyer to the Company in respect of other Goods or Services supplied by the Company

8.2.2 The Buyer selling the Goods in accordance with the provisions of these terms and conditions in which case title to the Goods shall be deemed to have passed to the Buyer immediately prior to delivery of the Goods to the Buyer's customers; and

8.2.3 The Company waiving its rights under this clause 8.2 in respect of specified Goods or Services whereupon title to the said Goods shall forthwith vest in the Buyer.

8.3 The Buyer is licensed by the Company to use or to agree to sell the Goods delivered to the Buyer subject to the express condition that the entire proceeds of any sale are held in trust for the Company and are not mixed with other moneys or paid into an overdraft bank account and shall at all times be identifiable as the Company's moneys.

8.4 Until title to the Goods passes:

8.4.1 The Buyer will hold the Goods as fiduciary agent and Bailee for the Company;

8.4.2 The Goods shall, subject to clause 8.3, be kept separate and distinct from all other property of the Buyer and of third parties and in good and substantial repair and condition and be stored in such a way as to be clearly identifiable as belonging to the Company;

8.4.3 The Company may at any time revoke the power of sale and use contained in clause 8.3 by notice to the Buyer if the Buyer is in default beyond the 20th of the month following invoice in the payment of any sum whatsoever due to the Company (whether in respect of the Goods or any other Goods or Services supplied at any time by it to the Buyer) or if the Company has bona fide doubts as to the solvency of the Buyer;

8.4.4 The Buyer's power of sale and use contained in clause 8.3 shall automatically cease if the Buyer has a petition presented for its winding-up or passes a resolution for voluntary winding-up otherwise than for the purpose of a bona fide amalgamation or reconstruction or compounds with its creditors or has a receiver appointed or all or any part of its assets or becomes bankrupt or insolvent or enters into any arrangements with creditors or takes or suffers any similar action in consequence of debts or carries out or undergoes any analogous act or proceeding under foreign law.

8.4.5 Upon determination of the Buyer's power of sale and use pursuant to clause 8.4.3 or clause 8.4.4, the Buyer shall place any of the Goods in its possession or under its control and unsold at the disposal of the Company and the Company shall be entitled to enter upon any premises of the Buyer for the purpose of removing such Goods.

8.5 The Company shall at any time be entitled to appropriate any payments made by the Buyer in respect of any Goods or Services in settlement of such invoices or accounts in respect of such Goods or Services as the Company may in its absolute discretion think fit notwithstanding any purported appropriation to the contrary by the Buyer.

9. LIEN AND STOPPAGE

9.1 Until such time as the title in the Goods has passed to the Buyer the Company has the right to withhold delivery if the Buyer (being a Company) has a petition presented for its winding-up or passes a resolution for voluntary winding-up otherwise than for the purpose of a bona fide amalgamation or reconstruction or compounds with its creditors or has a receiver appointed or all or any part of its assets or (being an individual) becomes bankrupt or insolvent or enters into any arrangements with creditors or takes or suffers any similar action in consequence of debts or carries out or undergoes any analogous act or proceeding under foreign law.

9.2 When the title in the Goods has passed to the Buyer and the time for payment has fallen due but payment has not been made or if the Buyer (being a Company) has a petition presented for its winding-up or passes a resolution for voluntary winding-up otherwise than for the purposes of a bona fide amalgamation or

reconstruction or compounds with its creditors or has a receiver appointed or all or any part of its assets or (being an individual) becomes bankrupt or insolvent or enters into any arrangements with creditors or takes or suffers any similar action in consequence of debts or carries out or undergoes any analogous act or proceedings under foreign law the Company has

9.2.1 A lien on the Goods as long as the Company is in possession of them

9.2.2 A right of stoppage in transit

9.2.3 A right of resale

9.3 For the avoidance of doubt it is hereby declared that nothing in this clause shall affect the rights given to the Company by ss.38-48 of the Sale of Goods Act 1979.

10. INSPECTION/SHORTAGES

10.1 The Buyer is under a duty to inspect the Goods forthwith on delivery and satisfy himself as to the due performance of Services forthwith after supply.

10.2 The Company shall be under no liability for any defects or shortages that would be apparent on careful inspection if the terms of this clause are not complied with, and, in any event, will be under no liability if a written complaint is not delivered to the Company within 7 days of delivery or supply detailing the alleged defect or shortage.

10.3 In all cases where defects or shortages in respect of Goods are complained of the Company shall be under no liability in respect thereof unless an opportunity to inspect the Goods is given to the Company before any use is made thereof or any alteration or modification is made thereto by the Buyer.

10.4 Subject to clauses 10.2 and 10.3 the Company shall make good any defect or shortage in the Goods and where appropriate replace any Goods damaged in transit as soon as it is reasonably able to do so, but otherwise shall be under no liability whatsoever or howsoever arising from such defect, shortage or damage.

10.5 Subject to clause 10.4 the Company shall remedy any defect in the supply of Services as soon as it is reasonably able to do so but otherwise shall be under no liability whatsoever or howsoever arising from such defect

11. WARRANTY

11.1 The Buyer shall satisfy himself of the suitability of the Goods or Services for any particular use or purpose and shall be totally responsible

11.2 If the Goods are in such a state or the Services so defectively supplied as would but for this condition entitle the Buyer to repudiate the contract and/or claim damages from the Company the Company reserves the right to repair or replace the Good or perform the Service (or relevant part thereof) again.

12. LIABILITY

12.1 Introduction

12.1.1 Nothing in clause 12 shall be deemed to exclude or restrict the Company's liability for death or personal injury resulting from negligence.

12.1.2 Each of the sub-clauses in clause 12 is to be treated as separate and independent.

12.1.3 The Company is willing to undertake liability additional to that provided by this clause in exchange for a higher price

12.2 Exclusion

12.2.1 Clause 12.2 only covers defects caused by faulty design, manufacture, materials or workmanship. It does not cover defects caused by abnormal use, misuse or neglect.

12.2.2 The Company agrees that if any defect covered by this clause is discovered during the warranty period commencing with the date of delivery or supply, the Company will remedy any defect at its own expense or, in the case of Goods if it chooses to do so, replace them.

12.2.3 The Buyer cannot claim the benefit of this clause unless - he informs the Company of the relevant defect in writing within 7 working days of discovering it.

12.2.3a The Company will not accept any liability for defects in goods once they have been fitted. It is the buyer's responsibility to check the goods prior to installation.

12.2.4 The risk of accidental loss whilst the Goods are being returned will be borne by the Buyer

12.2.5 In consideration for receiving the benefit of this clause, the Buyer agrees that, apart from those terms set out in clause 10 and 11, all other terms, whether conditions, warranties or innominate terms, express or implied, statutory or otherwise, are excluded from the contract between the Company and the Buyer to the extent permitted by law (except where the Buyer deals as consumer within section 12 of the Unfair Contract Terms Act 1977 when the terms implied by sections 13, 14 and 15 of the Sale of Goods Act 1979 shall be implied into the contract).

12.3 Exclusion of Consequential Loss

The Company shall not be liable for any consequential or indirect loss suffered by the Buyer whether this loss arises from breach of a duty in contract or tort or in any other way (including loss arising from the Company's negligence).

Non-exhaustive illustrations of consequential or indirect loss would be

- Loss of profits

- Loss of contracts

- Damage to property of the Buyer or anyone else, and

- Personal injury to the Buyer or anyone else (except so far as such injury is attributable to the Company's negligence)

12.4 Limitation

The Company's total liability for any one claim or for the total of all claims arising from any one act or default of the Company (whether arising from the Company's negligence or otherwise) shall not exceed £1000 Or the contract price whichever is the greater.

13. FORCE MAJEURE

13.1 The Company shall not be liable for any failure to deliver the Goods or perform the Services arising from circumstances outside the Company's control.

13.2 Non-exhaustive illustrations of such circumstances would be act of God, war, riot, explosion, abnormal weather conditions, fire, flood, strikes, lockouts, Government action or regulations (UK or otherwise), delay by suppliers, accidents and shortage of materials, labour or manufacturing facilities.

13.3 Should the Company be prevented from delivering the Goods or performing the Services in the above circumstances, it shall give the Buyer written notice of this fact as soon as reasonably practicable after discovering it.

13.4 If the circumstances preventing delivery of the Goods or performing the Services are still continuing three months after the Buyer receives the Company's notice, then either party may give written notice to the other cancelling the contract.

13.5 If the contract is cancelled in this way, the Company will refund any payment which the Buyer has already made on account of the price (subject to deduction of any amount the Company is entitled to claim from the Buyer) but the Company will not be liable to compensate the Buyer for any further loss or damage caused by the failure to deliver the Goods or perform the Services.

14. SALES PROMOTION DOCUMENTATION

Whilst the Company takes every precaution in the preparation of its catalogue, technical circulars, price lists and its other literature, these documents are for the Buyer's general guidance only and the particulars contained therein shall not constitute representations by the Company and the Company shall not be bound thereby.

15. NOTICES

Any notice to be given hereunder shall be in writing and shall be deemed to have been duly given if sent or delivered to the party concerned at its address specified overleaf or such other address as that party may from time to time notify in writing and shall be deemed to have been served, if sent by post, 48 hours after posting.

16. CANCELLATION

The Company is prepared to accept the cancellation of a contract provided that it is in writing and is received by the Company:

(a) In the case of special orders before the manufacture of the goods has commenced;

(b) In the case of goods ordered from stock before the goods have been despatched;

(c) But subject to liability for any losses incurred by the Company in disposing of the goods.

(d) In the event goods have been delivered within 30 days prior to cancellation, a restocking charge of 20% of the goods returned will be made by the company on values £50 before VAT only.

17. MATCHING

For technical reasons it is not always possible to obtain an exact colour match between different production batches which have the same colour description. The Company therefore recommends that all products should be of the same batch. The Company will be under no liability whatsoever in respect of any mismatching of tiles and sheet with the same colour description where the tiles and sheet are of different batches.

18. ADVICE AND WARNINGS

(a) Without prejudice to any of the Company's rights under these terms or common law or statute the Company shall not be liable for any loss or damage suffered by the Buyer or any third party as a result of failure to follow any of the Company's recommendations with regard to the goods.

(b) Without prejudice to any of the Company's rights under these terms or common law or statute the Company shall not be liable for any loss or damage suffered by the Buyer or any third party as a result of failure to follow any of the Company's recommendations with regard to the goods.

19. STILETTO HEELS

Where Stiletto heeled shoes are in use, floors are liable to suffer damage from intense point loading pressure. We therefore cannot be held responsible for any loss in appearance where such heels are in use.

20. SUITABILITY OF GOODS

If requested in writing to do so, we will use our utmost endeavours to give sound and honest advice as to the suitability of goods sold by us for a particular use or purpose, but we do not represent or warrant (and nobody has authority to represent or warrant) the fitness of any goods for any particular purpose or use, whether such use or purpose is known to us or not or any advice requested regarding installation.

21. ASSIGNMENT

The Buyer shall not assign or purport to assign or transfer the contract or the benefits thereof to any other person without prior written consent of the other.

22. PROPER LAW AND JURISDICTION

The Contract shall be governed by and construed in accordance with English law and all disputes arising in connection with the contract shall be submitted to the jurisdiction of the English Courts.

23. HEADINGS

The headings of these conditions are for convenience only and shall have no effect on the interpretation thereof.

Revision Date: July 2018

Woodpecker Flooring, Coerphilly CF83 8DR

Tel: 02920 888223

Woodpecker Flooring reserves the right to update and amend these terms and conditions without notice.





1. BE INSPIRED

Discover more about Woodpecker floors and browse home design tips at our website.

www.woodpeckerflooring.co.uk/inspiration

2. VIEW SAMPLES

Select samples of your favourite floors and get the first 3 free to try out in your space.

www.woodpeckerflooring.co.uk/samples

3. VISIT A RETAILER

Chat through your flooring project with one of our friendly Woodpecker retailers. Find your nearest at

www.woodpeckerflooring.co.uk/retailers

WOODPECKER

NATURALLY INSPIRED FLOORING

Woodpecker House,
26 Pant Glas Industrial Estate,
Bedwas, Caerphilly
CF83 8DR

T: 02920 888 223

F: 02920 881 694

info@woodpeckerflooring.co.uk

www.woodpeckerflooring.co.uk